
INSTALLATION INSTRUCTIONS


ELESONY-SML Static Wall Mount With Lateral Shift

Prior to assembly, unpack carton completely and verify contents. If you are missing any of the following components, please contact Technical Support at 1-800-776-5768.

Static Wall Mount Components

- (1) PLASMA STATIC WALL MOUNT
- (2) LATCH, SAFETY
- (2) NYLON WASHER
- (2) 10-24 X .5 FH UNDERCUT SCREW
- (2) 10-24 NYLOCK NUT



Wall Mount
Components

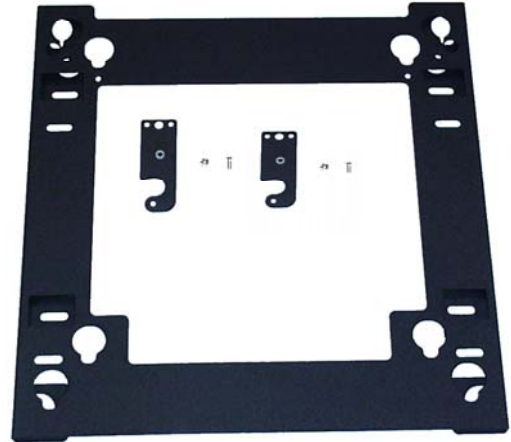

Lateral Shift Components

- (2) LATERAL SHIFT EXTRUSIONS
- (4) STUDS, 5/16-18 Threaded
- (4) NUTS, T-slot 5/16-18
- (4) WASHERS, Lock 5/16
- (4) WASHERS, Flat 5/16
- (4) SCREWS, Panhead Self Tapping
8 x .25
- (4) NUTS, Hex 5/16-18

Lateral Shift
Components

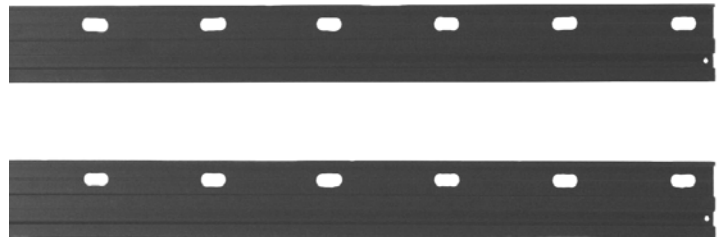

WARNING: IMPROPER INSTALLATION MAY RESULT IN SERIOUS PERSONAL INJURY!
CAUTION: PLASMA DISPLAYS ARE EXTREMELY FRAGILE!

INSTALLATION INSTRUCTIONS

READ COMPLETELY BEFORE PROCEEDING

Assemble Lateral Shift

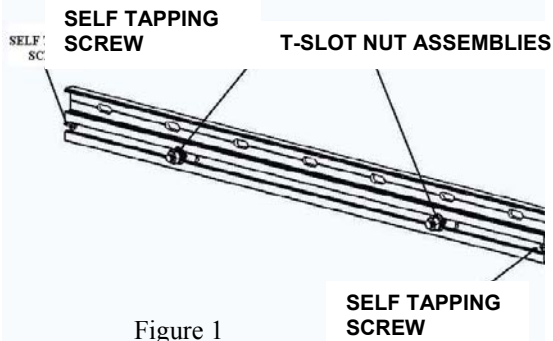


Figure 1

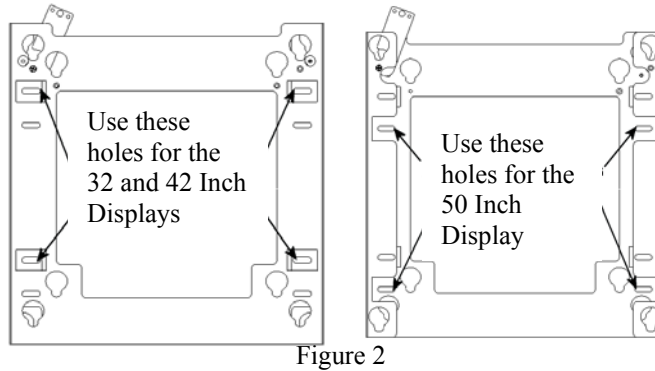


Figure 2

1. Install the four threaded studs into the four T-slot nuts.
2. Insert two T-slot nut assemblies into each of the lateral shift extrusions (Figure 1).
3. Insert one self-tapping screw into each end of the extrusions to trap T-slot nut assemblies in the tracks (Figure 1).
4. Connect lateral shift extrusions to the plasma static wall mount by inserting the T-slot studs into holes, with the proper face of the mount away from the wall for your respective plasma (see Figure 2), and secure using four flat washers, four lock washers, and four hex nuts

Mount Lateral Shift

1. Locate and mark stud locations at desired mounting place.
2. Select four mounting holes in the lateral shift extrusions that will align with the stud pattern and mark at least two mounting holes per extrusion at the stud locations.

WARNING: Your mounting structure must be capable of supporting four times the combined weight of the plasma and the mount.

3. Mount the extrusions using a minimum of four anchors.

Mount Plasma

1. Attach latching flags to mount, using the proper position on the mount (see Figure 3, Figure 4, Figure 5, & Figure 6), with the latching flag on the inside of the mount. Tighten Nylock nut until friction is sufficient to hold the latch in place.
2. Turn latching flags to the side prior to setting plasma in place.
3. With the aid of another person, lift plasma display up to the mount, aligning mounting buttons with the teardrop slots dependent upon the model plasma (see Figure 8 for 32" and 42" & Figure 9 for 50").
4. Raise safety latch to secure plasma in place (see Figure 10).

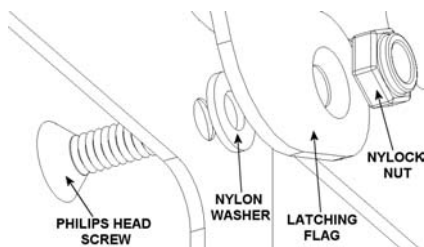


Figure 3




Figure 4




Figure 5




Figure 6

USE INSIDE SLOTS FOR 32" PLASMA
USE OUTSIDE SLOTS FOR 42" PLASMA




Figure 8




Figure 9

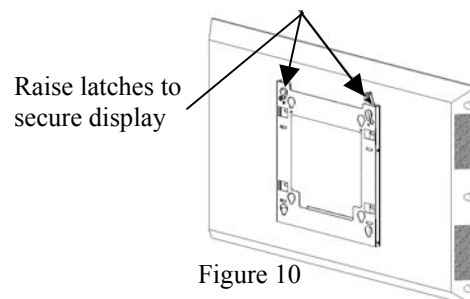


Figure 10