
INSTALLATION INSTRUCTIONS

LCD DISPLAY STATIC MOUNT PSM-2098

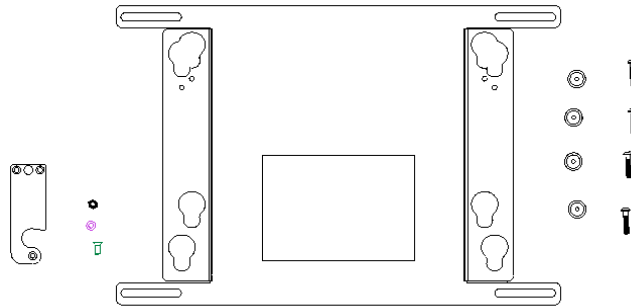


Figure 1

- | | |
|--|----------------------|
| (1) LCD Static Mount | (1) Nylon Washer |
| (1) Latching Flag | (1) 10-24 Nylock Nut |
| (1) 10-24 x .5 Phillips Flat Head Undercut Screw | |

(If needed, mounting buttons and M5 screws are supplied to use PAC-130 or PAC-135 security accessories. See note below.)

- | | |
|-------------------------------------|------------------------------|
| (4) M5 x 25mm Button Head Cap Screw | (4) Mounting Buttons – Green |
| (1) M3 Hex Key | |

BEFORE PROCEEDING: Unpack the carton, verify contents shown in Figure 1 and read installation instructions completely. If you are missing any of the listed components, please contact Customer Service at 1-800/582-6480.

CAUTION! LCD Displays are Extremely Fragile.

1. Secure latching flag to mount using the 10-24 undercut screw, Nylon washer, and Nylock nut (see Figure 2). Tighten until friction will hold the flag in place. Use hole on other side of bracket with PAC-130 or PAC-135 security accessory.

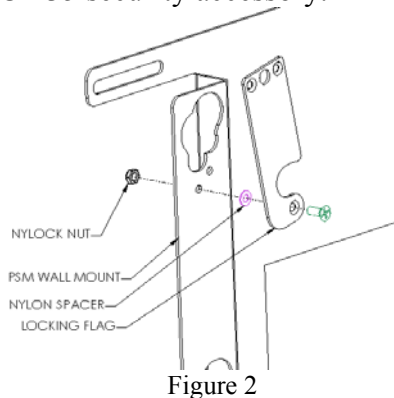


Figure 2



CHIEF MANUFACTURING INC.
1-800-582-6480 952-894-6280 FAX 952-894-6918
8401 EAGLE CREEK PKWY, STE 700
SAVAGE, MINNESOTA 55378 USA

8805-000044 Rev01
2003 Chief Manufacturing
www.chiefmfg.com
08/04

WARNING

ALL COMPONENTS MUST BE SECURELY FASTENED TO A STRUCTURAL MEMBER CAPABLE OF SUPPORTING 4 TIMES THE COMBINED WEIGHT OF ALL COMPONENTS PLUS THE EQUIPMENT BEING MOUNTED. IF IT CANNOT SUPPORT THIS WEIGHT, THE STRUCTURE MUST BE REINFORCED. THE MAXIMUM WEIGHT TO BE INSTALLED ON THE MOUNT IS 175 POUNDS (79.38 KG).

2. Securely anchor the LCD static mount to wall studs or supporting framework (see WARNING).
3. Make sure the flag is lowered before attempting to place the display on the mount.
4. With the aid of another person, lift the display up to the mount, align the mounting buttons on the display with the teardrop slots in the mount, and set the display into place (see Figure 3).
5. Position (raise) the flag to secure display.

NOTE: When attaching PAC-130 or PAC-135 security accessories, replace existing mounting buttons and screws with those supplied with mount.

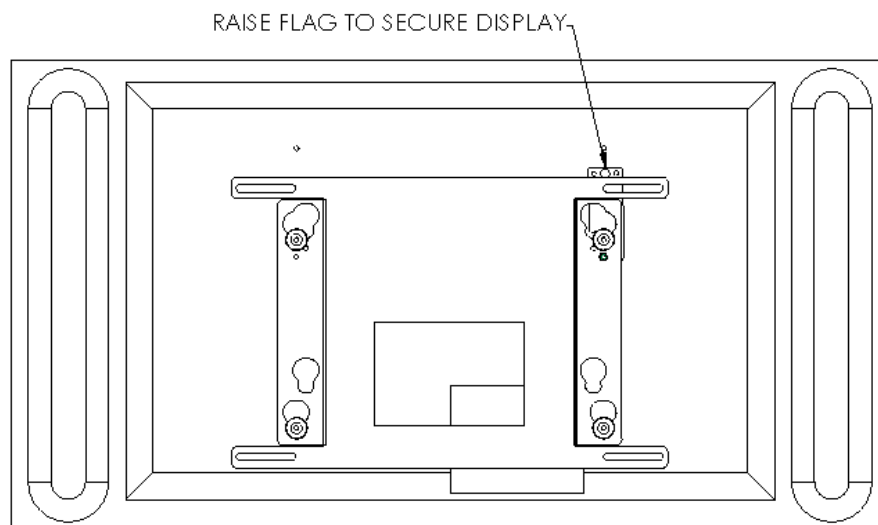


Figure 3