

OPERATING INSTRUCTIONS

Cinematic Remote Control Model: CM6 Series

The CM6 Series infrared remote control is used to control the Chief Cinematic CM6 Series automated systems.



The control has a range of 20-30ft (6-9m), and is powered by 2 AAA batteries.

Control Identification

The following table identifies the remote control functions available.

| KEY | FUNCTION |
|-----|---|
| 1* | System lights fade to off |
| 2 | Sets cabinet lights to "Bright" |
| 3 | Sets cabinet lights to "Dim" |
| 4 | Opens doors and Dims cabinet lights |
| 5 | Closes doors and Brightens cabinet lights |
| 6 | Raises cabinet light intensity |
| 7 | Lowers cabinet light intensity |

*Pressing and holding activates delayed fade to off. Delay increases in 10 second increments from 0 to 60seconds. Each illuminated LED on dimmer (see figure below) = 10 seconds of delay.

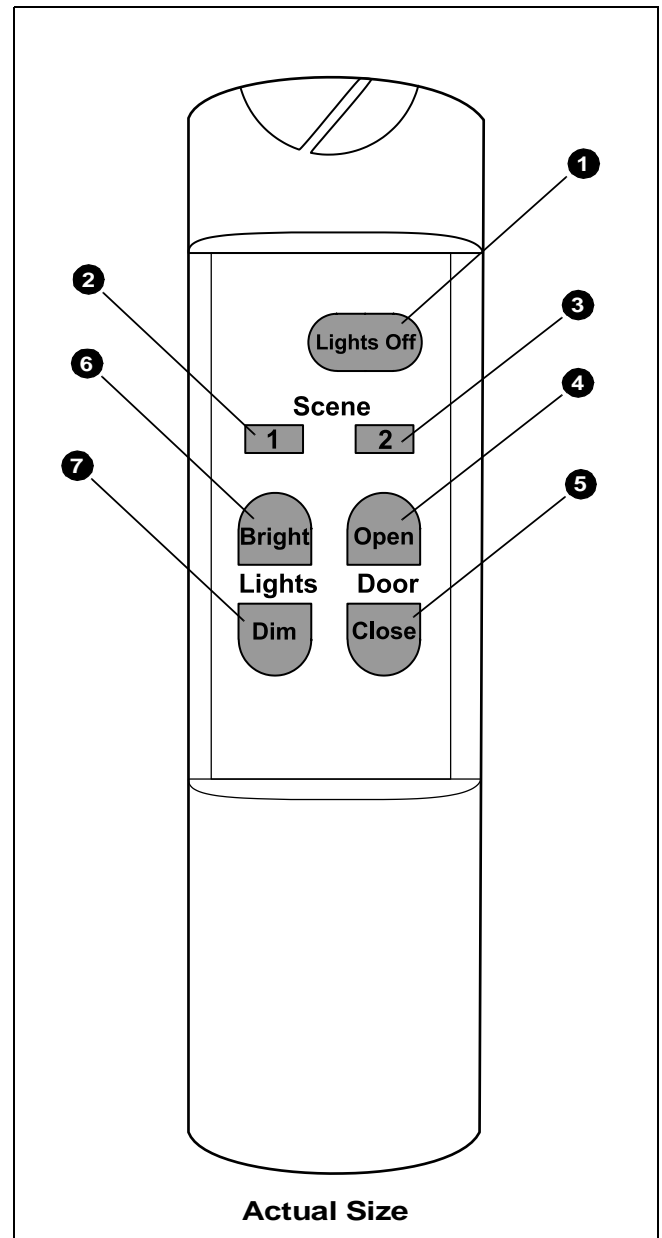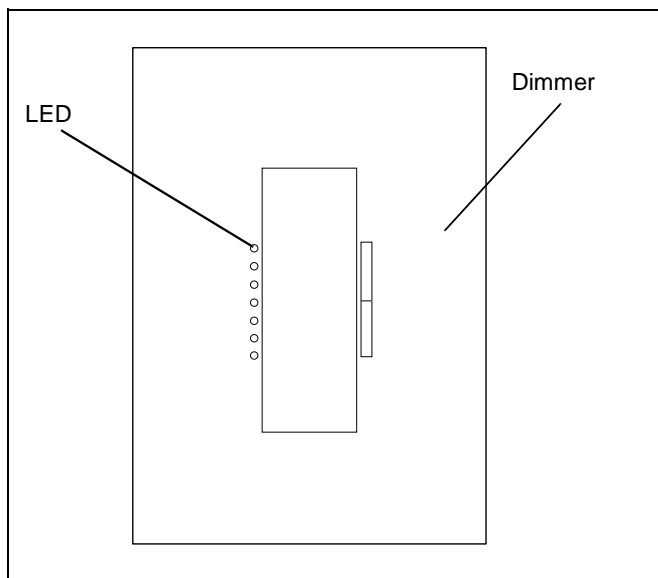

CHIEF MANUFACTURING INC.
1-800-582-6480 952-894-6280 FAX 952-894-6918
8401 EAGLE CREEK PARKWAY, STE 700
SAVAGE, MINNESOTA 55378 USA

8820-000018
©2007 Chief Manufacturing
www.chiefmfg.com
02/07