

INSTALLATION INSTRUCTIONS

OFFSET FIXED CEILING PLATE FOR USE WITH 2" NPT

CMA-332 

The CMA-332, Offset Fixed Ceiling Plate provides cable access for installation with any height of drop ceiling. By using any length of standard 2" NPT pipe threaded on both ends, you can extend the height capabilities to meet your needs.

WARNING: IMPROPER INSTALLATION MAY RESULT IN SERIOUS PERSONAL INJURY!

When mounting Chief Manufacturing accessories, the structural system and mounting method **MUST** be capable of supporting 5 times the combined weight of the total installation.

The maximum weight to be installed on the ceiling plate is 500 pounds (226.8 Kg).

Unpack and check contents:

- (1) Ceiling Plate
- (1) 5/16 – 18 Socket Set Screw
- (1) 5/32" Hex Wrench

INSTALLATION INSTRUCTIONS

1. Securely install ceiling plate to ceiling joists. (SEE WARNING ABOVE) Bolt hole spacing is shown on Figure 1.
2. Thread your standard NPT 2" pipe into coupler, tighten securely.
3. Install and securely tighten the 5/16 – 18 socket set screw.

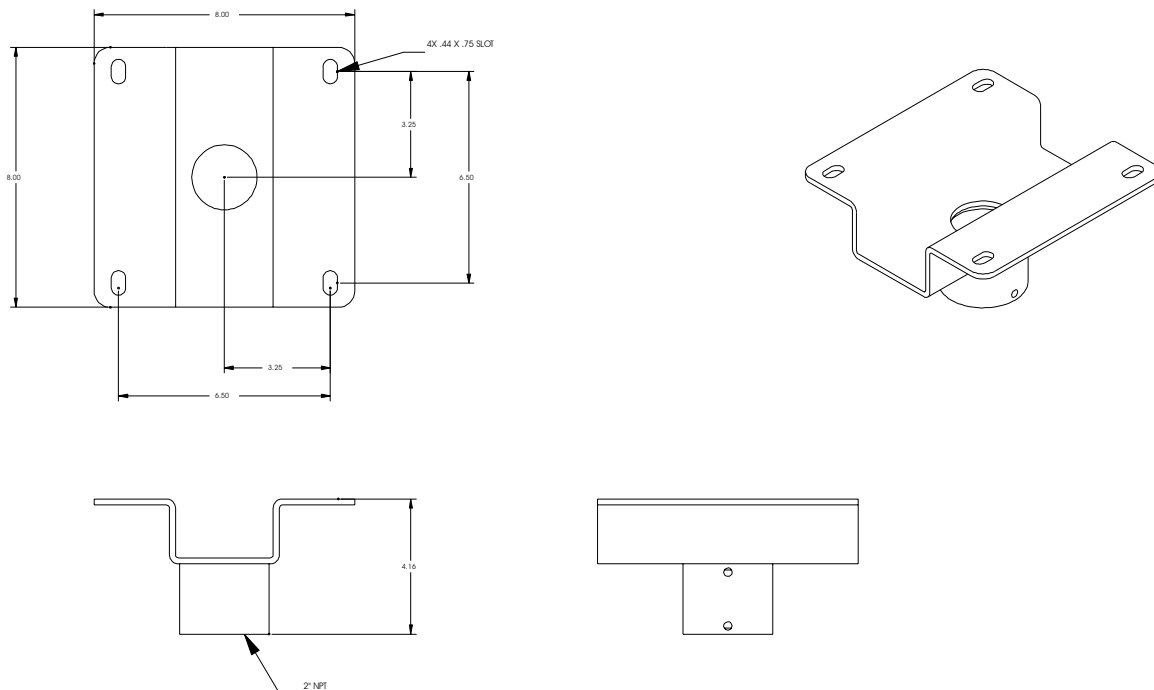


Figure 1. CMA-332 Dimensions



CHIEF MANUFACTURING INC.
1-800-582-6480 952-894-6280 FAX 952-894-6918
12800 HIGHWAY 13 SOUTH, SUITE 500
SAVAGE, MINNESOTA 55378 USA

8803-000018
2003 Chief Manufacturing
www.chiefmfg.com
01/03