

INSTALLATION INSTRUCTIONS

INTERNAL JOIST MOUNT

CMA-385

Prior to assembly, unpack carton completely and verify contents.

If you are missing any of the following components, please contact Customer Service at 1-800/582-6480

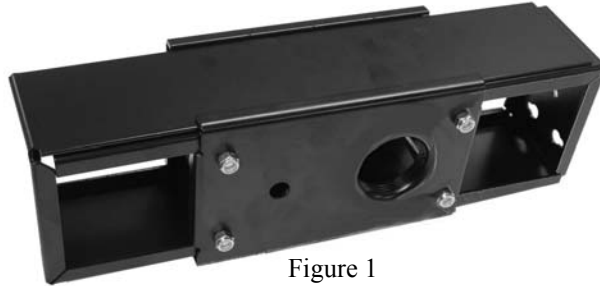


Figure 1

- (2) Internal Joist Mount Half
- (1) Internal Joist Mount Top Plate
- (1) Internal Joist Mount Bottom Plate

- (4) 1/4-20X4" Carriage Bolt
- (4) 1/4-20 Nylock Nuts
- (8) #10X1.5" Wood Screw

BEFORE PROCEEDING, READ INSTALLATION INSTRUCTIONS COMPLETELY

WARNING: IMPROPER INSTALLATION MAY RESULT IN SERIOUS PERSONAL INJURY!

When mounting Chief Manufacturing accessories, the structural system and mounting method **MUST** be capable of supporting 5 times the combined weight of the total installation.

NOTE: The threaded mounting hole accepts an optional standard threaded pipe (not included) and the 1/2" hole accepts threaded rod (not included).

1. Assemble two halves of the Internal Joist Mount as shown in Figure 2.
2. Place Internal Joist Mount Top Plate and Internal Joist Mount Bottom Plate on Internal Joist Mount as shown in Figure 3 and secure using four 1/4-20X4" Carriage bolts and 1/4-20 Nylock nuts.
3. Using the Internal Joist Mount as a template, locate and mark eight screw hole locations on the ceiling joists.
4. Secure the Internal Joist Mount to the ceiling joist using eight #10X1.5" wood screws provided. Tighten all nuts, bolts and screws securely.



Figure 2



Figure 3



CHIEF MANUFACTURING INC.
1-800-582-6480 952-894-6280 FAX 952-894-6918
12800 HIGHWAY 13 SOUTH, SUITE 500
SAVAGE, MINNESOTA 55378 USA

8803-000029
2002 Chief Manufacturing
www.chiefmfg.com
05/02