
# INSTALLATION INSTRUCTIONS

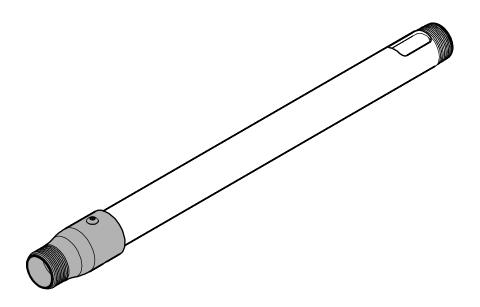

**Cut-Off Thread Adapter** 

**©CHIEF** 

**CMS-260** 

CMS-260 Installation Instructions

## **DISCLAIMER**

Milestone AV Technologies, Inc., and its affiliated corporations and subsidiaries (collectively, "Milestone"), intend to make this manual accurate and complete. However, Milestone makes no claim that the information contained herein covers all details, conditions or variations, nor does it provide for every possible contingency in connection with the installation or use of this product. The information contained in this document is subject to change without notice or obligation of any kind. Milestone makes no representation of warranty, expressed or implied, regarding the information contained herein. Milestone assumes no responsibility for accuracy, completeness or sufficiency of the information contained in this document.




**WARNING:** A WARNING alerts you to the possibility of serious injury or death if you do not follow the instructions.



**CAUTION:** A CAUTION alerts you to the possibility of damage or destruction of equipment if you do not follow the corresponding instructions.




**WARNING:** Failure to read, thoroughly understand, and follow all instructions can result in serious personal injury, damage to equipment, or voiding of factory warranty! It is the installer's responsibility to make sure all components are properly assembled and installed using the instructions provided.




 The weight capacity of the CMS-260 may be LIMITED to the lowest weight capacity of any other component located between the CMS-260 and the supporting structure!


# **DIMENSIONS**

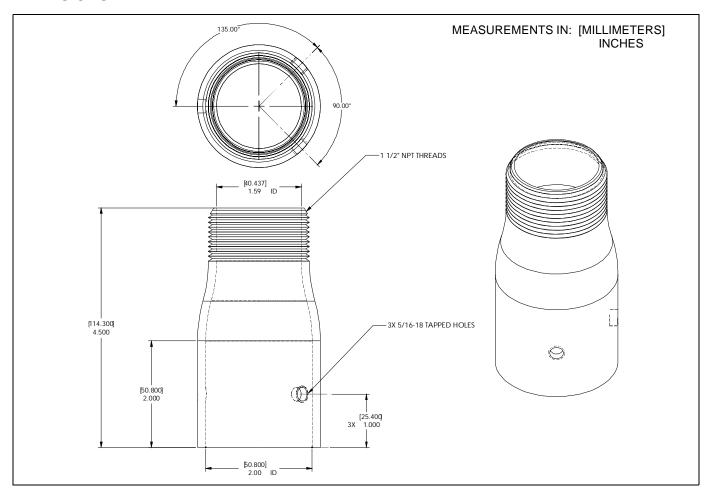


Installation Instructions CMS-260

#### **LEGEND**

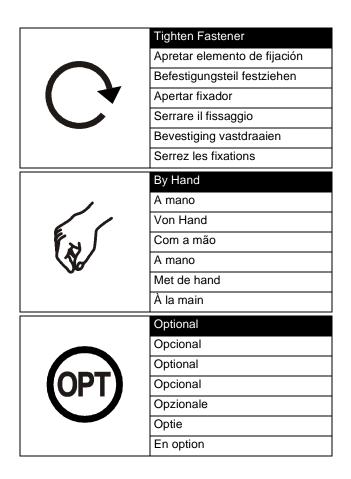



## **TOOLS REQUIRED and PARTS PROVIDED**

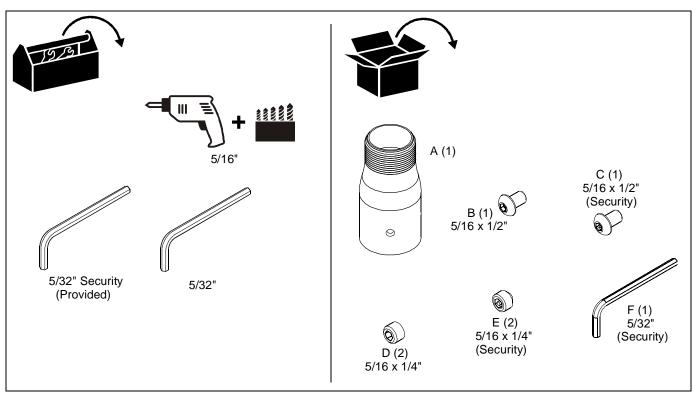

CMS-260 Installation Instructions

# **ASSEMBLING COLUMN**

- 1. Cut off 1-1/2" NPT pipe at desired length.
- 2. Drill a 5/16" hole 1" from end of pipe. (See Figure 1)

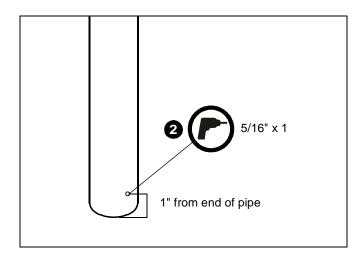


Figure 1

3. Slide CMS-260 (A) onto end of pipe and attach with a 5/16 x 1/2" button head cap screw (B) or 5/16 x 1/2" button head security cap screw (C). (See Figure 2)

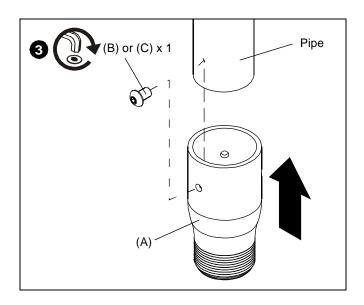


Figure 2

 Attach and tighten two 5/16 x 1/4" set screws (D) or two 5/16 x 1/4" security set screws (E) into side of CMS-260 (A). (See Figure 3)

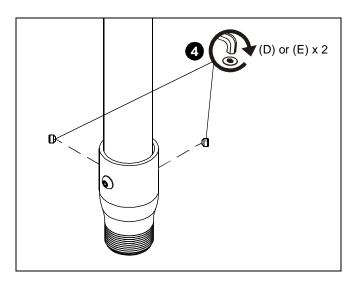


Figure 3

Install the 1-1/2" NPT threaded column with the attached CMS-260 following instructions provided with the column.

Installation Instructions CMS-260

CMS-260 Installation Instructions



8803-000106 ©2008 Chief Manufacturing www.chiefmfg.com 02/08 **USA/International** A 8401 Eagle Creek Parkway, Savage, MN 55378

**P** 800.582.6480 / 952.894.6280

**F** 877.894.6918 / 952.894.6918

A Fellenoord 130 5611 ZB EINDHOVEN, The Netherlands

**P** +31 (0)40 2668620

**F** +31 (0)40 2668615

**Europe** 

Asia Pacific A Room 24F, Block D, Lily YinDu International Building

LuoGang, BuJi Town, Shenzhen, CHINA.

深圳市布吉罗岗村百合银都国际大厦D栋24F

**P** +86-755-8996 9226 **F** +86-755-8996 9217