

# INSTALLATION INSTRUCTIONS

## ELEDTS42W-PRO(L) Mounting Bracket

Prior to assembly, unpack carton completely and verify contents. If you are missing any of the following components, please contact Technical Support at 1-800-776-5768.

- (1) PLASMA STATIC BRACKET
- (4) MOUNTING BUTTONS
- (4) M8 X 1.25 X 50MM BHCS
- (1) M5 ALLEN KEY
- (4) .875ODX.3125IDX1.00" NYLON SPACER
- (4) 10-24 BUTTON HEAD CAP SCREWS
- (1) 1/8" ALLEN KEY

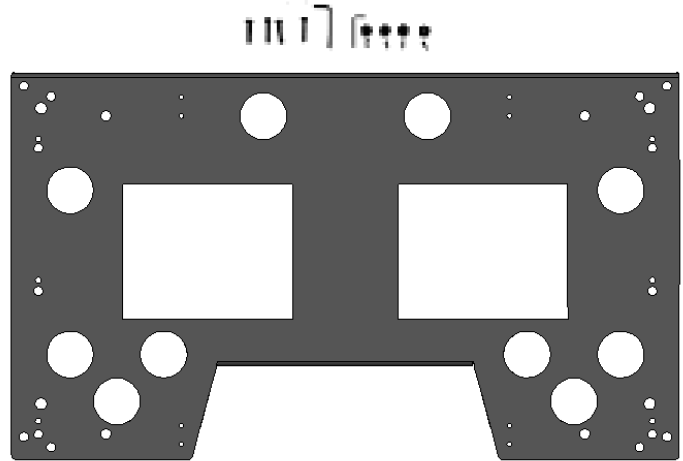


Figure 1

**CAUTION: PLASMA DISPLAYS ARE EXTREMELY FRAGILE!**

### READ INSTALLATION INSTRUCTIONS COMPLETELY BEFORE PROCEEDING

1. Using a 10-24 button head cap screw inserted in the non-chamfered hole at a spacing of 14", secure mounting button, with chamfered hole of mounting button (larger surface) facing bracket, to bracket (four places) (see Figure 2 & Figure 3).
2. Remove factory installed mounting buttons if they are installed on plasma. Place 4 Nylon spacers on plasma over mounting threads in plasma (see Figure 3 & Figure 4).
3. Place plasma bracket on plasma with bent lip towards the plasma (see Figure 3 & Figure 4).
4. Insert M8 bolts and tighten-ensuring not to over tighten.
5. With the aid of another person, lift Plasma Display up to the Chief Mount, aligning buttons of mounting brackets with slots in the Chief Mount.
6. Lower safety catch on the Chief Mount to secure Plasma Display, making sure catch is completely engaged.




Figure 2




Figure 3




Figure 4