

# INSTALLATION INSTRUCTIONS

## ELELG40-PRO Mounting Bracket

Prior to assembly, unpack carton completely and verify contents. If you are missing any of the following components, please contact Technical Support at 1-800-776-5768.

- (1) BRACKET, PLASMA STATIC MOUNT
- (4) Mounting Buttons
- (4) 10-24 x .5 Button Head Cap Screws
- (6) M5-.8 x 16 Phillips HCS
- (1) 1/8" Allen Key

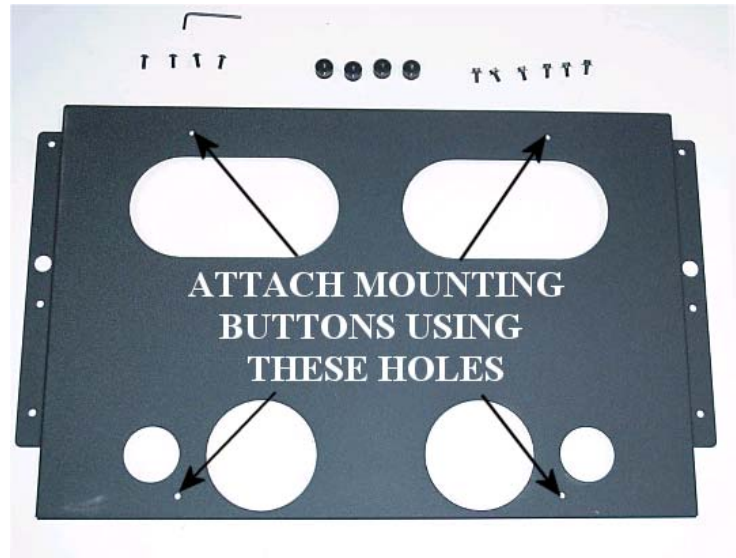


Figure 1

**CAUTION: PLASMA DISPLAYS ARE EXTREMELY FRAGILE!**

**READ INSTALLATION INSTRUCTIONS COMPLETELY  
BEFORE PROCEEDING**

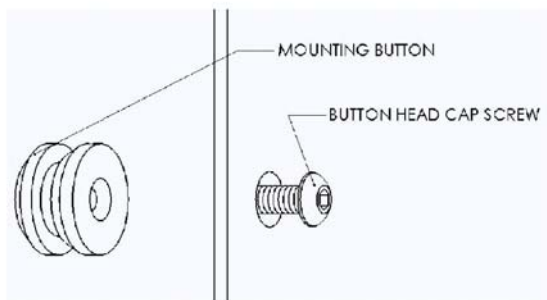


Figure 2

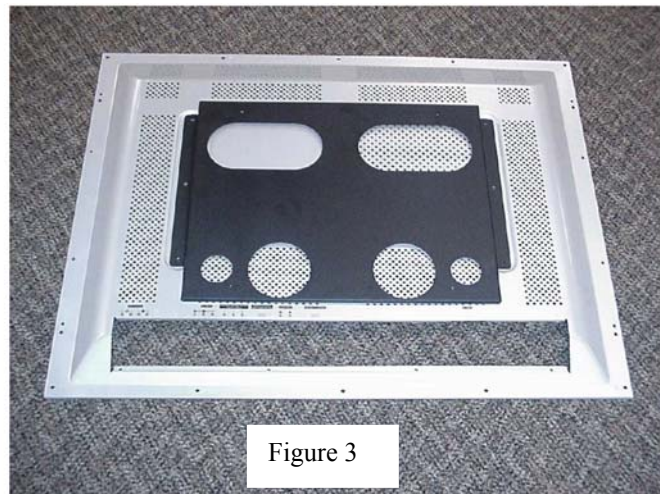


Figure 3

1. Using a 10-24 button head cap screw inserted from the back side of bracket, secure mounting button, to bracket (four places). (See Figures 1 & 2).
2. Align hole pattern on brackets with pattern on back of Plasma Display and attach utilizing the M5 Phillips head cap screws (see Figure 3).
3. With the aid of another person, lift Plasma Display up to the Chief Mount, aligning buttons of mounting brackets with slots in the Chief Mount.
4. Lower safety catch on the Chief Mount to secure Plasma Display, making sure catch is completely engaged.