

INSTALLATION INSTRUCTIONS

ELESAN32-PRO Mounting Bracket

Prior to assembly, unpack carton completely and verify contents. If you are missing any of the following components, please contact Technical Support at 1-800-776-5768.

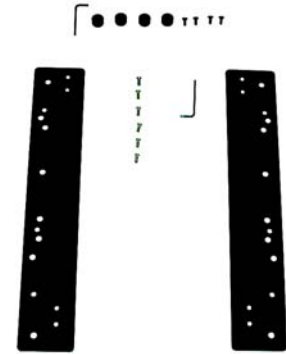


Figure 1

- (1) PLASMA STATIC LEFT MOUNT BRACKET
- (4) MOUNTING BUTTONS, BLACK
- (6) M5 X 16 MM BUTTON HEAD CAP SCREWS
- (6) NYLON SPACERS .500" OD X .257" ID X 3/16"

- (1) PLASMA STATIC RIGHT MOUNT BRACKET
- (4) 10-24 FLAT HEAD CAP SCREWS
- (1) 1/8" ALLEN KEY
- (1) 3MM ALLEN KEY

CAUTION: PLASMA DISPLAYS ARE EXTREMELY FRAGILE!

READ INSTALLATION INSTRUCTIONS COMPLETELY BEFORE PROCEEDING

1. Using the 5/16-18 hex head cap screws inserted through the button at a spacing of 14", secure mounting button, with the Nylock nuts, to bracket (four places) (See Figures 2 & 3). Tighten securely utilizing a two 1/2" wrenches.
2. Place nylon spacers over the mounting holes as shown in Figures 4 & 5 then align hole pattern on brackets with pattern on back of Plasma Display. Attach using the M5 x 16mm cap screws (See Figures 4 & 5).
3. With the aid of another person, lift Plasma Display up to the mount, aligning buttons of mounting brackets with slots in the mount.
4. Lower safety catch on the mount to secure Plasma Display, making sure catch is completely engaged.




Figure 2




Figure 3




Figure 4

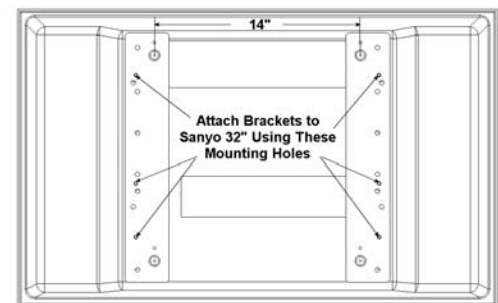


Figure 5