



INSTALLATION INSTRUCTIONS

FSB-4205

FLAT PANEL DISPLAY ADAPTER PLATE

For Samsung Model LTM1525

Prior to assembly, unpack carton completely and verify contents.
If you are missing any of the following components, please contact Customer Service at 1-800/582-6480

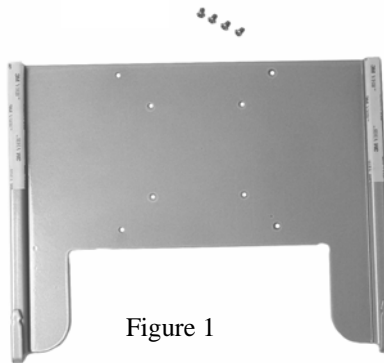


Figure 1

(1) Adapter Bracket

(4) M4 X 6mm Phillips Pan Head Screws

BEFORE PROCEEDING, READ INSTALLATION INSTRUCTIONS COMPLETELY

CAUTION! FLAT PANEL DISPLAYS ARE EXTREMELY FRAGILE.

1. Peel adhesive protective paper back approximately ¼” on each side of adapter bracket to facilitate removal later (see Figure 2).
2. Slide hooks of adapter bracket into slots at bottom of flat panel display until fully seated (see Figure 3 and Figure 4).
3. Remove adhesive protective paper from each side of adapter bracket
4. Seat and apply pressure above each adhesive area on adapter bracket for 60 seconds to ensure a strong bond between adapter bracket and flat panel display.

Optional VESA Mounting

5. Using a Phillips screwdriver, remove four mounting buttons from adapter bracket.
6. Using four inside holes of adapter bracket and M4-.7 X 6mm Phillips Screws (provided), secure adapter bracket to any 75mm VESA pattern.



Figure 2

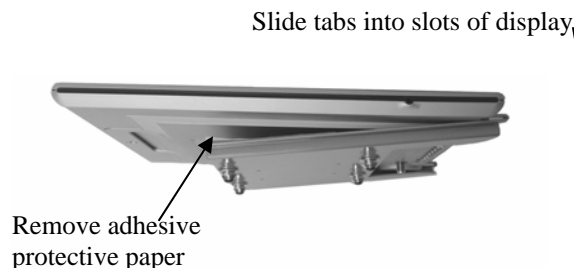


Figure 3

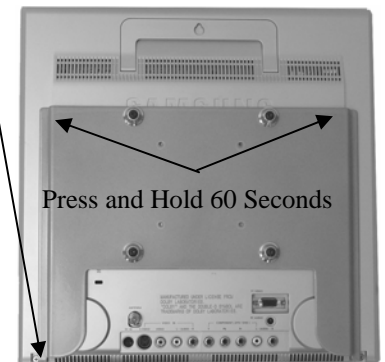


Figure 4

8804-000039

CHIEF MANUFACTURING INC. 1-800-582-6480, Fax: 1-877-894-6918, Email: chief@chiefmfg.com

04/14/04