



INSTALLATION INSTRUCTIONS

FSB-4213

FLAT PANEL DISPLAY ADAPTER PLATE

For Sharp LC-15M4U

Prior to assembly, unpack carton completely and verify contents.
If you are missing any of the following components, please contact Customer Service at 1-800/582-6480.

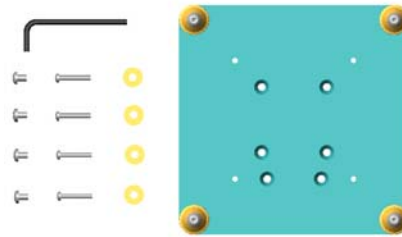


Figure 1

- (1) Adapter Bracket
- (4) Nylon Spacer

- (4) M4 X 6mm Phillips Pan Head Screws
- (4) M3 X 20mm Pan Head Machine Screws
- (1) 1/8" Hex Key

BEFORE PROCEEDING, READ INSTALLATION INSTRUCTIONS COMPLETELY

CAUTION!

FLAT PANEL DISPLAYS ARE EXTREMELY FRAGILE.

1. Remove table stand from back of display.
 2. Place nylon spacers over four mounting holes.
 3. Align four center countersink holes with mounting holes on back of display and secure with (4) M3 screws.
- Optional VESA mounting:
4. Using 5/32" hex key, remove four mounting buttons from bracket.
 5. Using four tapped holes of interface bracket and M4 X 6mm Phillips Screws (provided), secure adapter bracket to any mounting device that uses a 75mm x 75mm VESA pattern.

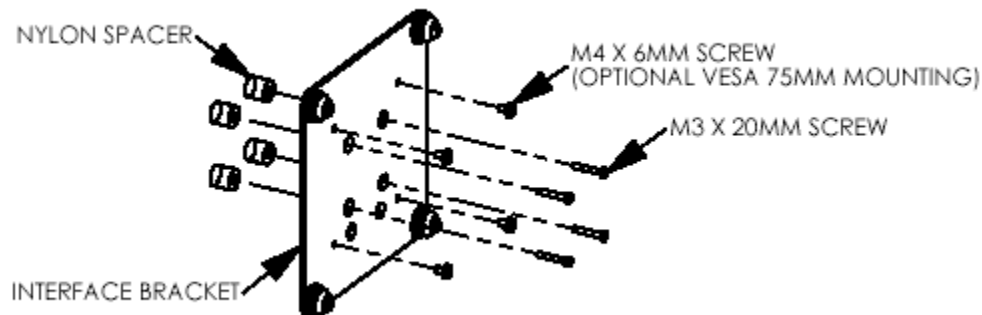


Figure 2