



INSTALLATION INSTRUCTIONS

FSB-4218

FLAT PANEL DISPLAY ADAPTER PLATE

For Kodak DirectView Remote Operations Panel

Prior to assembly, unpack carton completely and verify contents.

If you are missing any of the following components, please contact Customer Service at 1-800/582-6480.

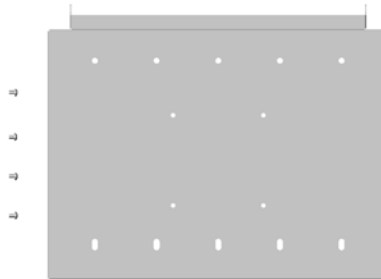


Figure 1

(1) Adapter Bracket

(4) M4 X 6mm Phillips Pan Head Screws

BEFORE PROCEEDING, READ INSTALLATION INSTRUCTIONS COMPLETELY

CAUTION! FLAT PANEL DISPLAYS ARE EXTREMELY FRAGILE.

1. If remote operations panel has wall mounting bracket attached, remove existing bracket by removing two #6-32 x .25 Phillips pan head screws.
2. Using two #6-32 x 25 Phillips pan head screws from wall mount bracket, secure new adapter bracket to display.
3. Using four inside holes of interface bracket and M4 X 6mm Phillips head screws (provided), secure adapter bracket to any mounting device that uses a 100mm x 100mm VESA pattern.

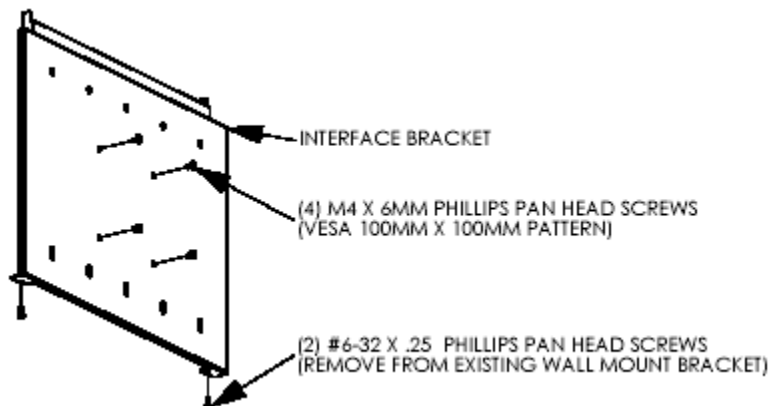


Figure 2