



INSTALLATION INSTRUCTIONS

FSB-4220

FLAT PANEL DISPLAY ADAPTER PLATE

For VIEWSONIC N2700W

Prior to assembly, unpack carton completely and verify contents.

If you are missing any of the following components, please contact Customer Service at 1-800/582-6480.

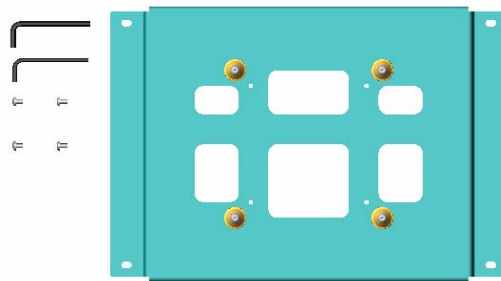


Figure 1

- (1) Adapter Bracket
- (1) 1/8" Hex Key

- (4) M4 X 6mm Phillips Pan Head Screws
- (1) 5/32" Hex Key

BEFORE PROCEEDING, READ INSTALLATION INSTRUCTIONS COMPLETELY

CAUTION!

FLAT PANEL DISPLAYS ARE EXTREMELY FRAGILE.

1. If flat panel display has table stand attached, remove existing stand with 5/32" hex key.
2. Place bracket on back of display as shown in Figure 2, insert button head cap screws from step 1, and tighten.

Optional VESA Mounting

3. Using 1/8" hex key, remove four mounting buttons from bracket.
4. Using four inside tapped holes of interface bracket and M4 X 6mm Phillips Screws (provided), secure adapter bracket to any mounting device using a 100mm x 100mm VESA pattern.

