



INSTALLATION INSTRUCTIONS

FSB-4229

FLAT PANEL DISPLAY ADAPTER PLATE

For SAMSUNG LT-P1545

Prior to assembly, unpack carton completely and verify contents.

If you are missing any of the following components, please contact Customer Service at 1-800/582-6480.

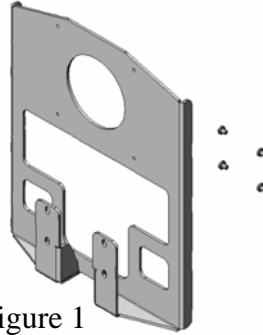


Figure 1

(1) Interface Bracket

(4) M4 X 5mm Phillips Pan Head Screws

BEFORE PROCEEDING, READ INSTALLATION INSTRUCTIONS COMPLETELY

CAUTION! FLAT PANEL DISPLAYS ARE EXTREMELY FRAGILE.

1. Using a Phillips head screwdriver, remove table stand from display.

****Important**** *Keep the four Phillips pan head screws removed with the table stand! They will be used in the interface assembly.*

2. Insert the interface bracket into the slots on the bottom of the display, originally used for the table stand; until the bottom of interface bracket and display is flush (see Figure 2).
3. Using the four screws removed from the table stand; secure the interface bracket to the display by threading them back into the holes at the bottom of the screen (see Figure 3).
4. Thread two M4 x 5mm Phillips Pan head screws (provided) into the top two holes on the interface bracket and mount onto any Chief Centris™ mount (see Figure 3 and Figure 4).
5. Thread the remaining two M4 x 5mm Phillips Pan head screws (provided) and tighten all four screws securing the interface bracket to the mount (see Figure 4).

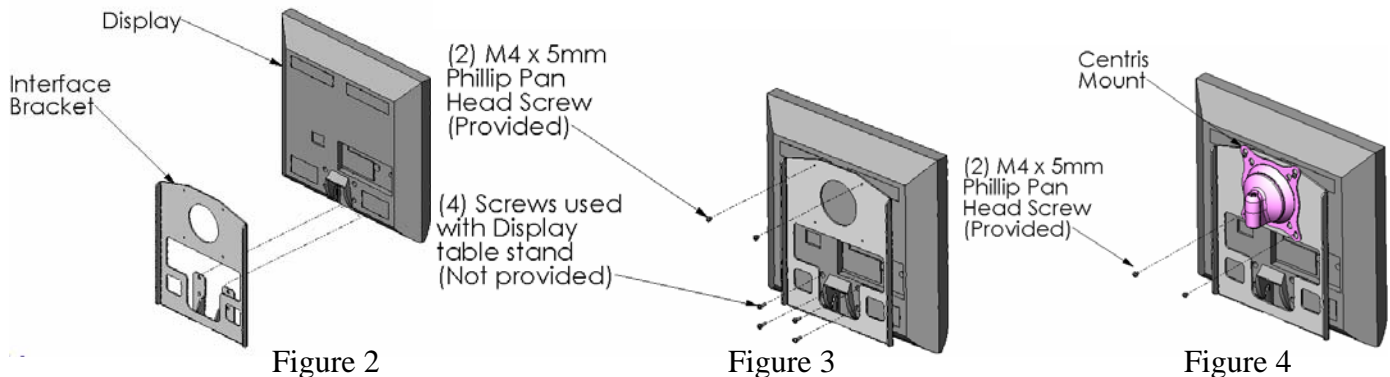


Figure 2

Figure 3

Figure 4