



VIDEO PROJECTOR CEILING MOUNT HB-64S

The Chief HB-64S video projector ceiling mount is designed to provide fast, simple and secure installation of the Sharp XG-V10WU. Special roll, pitch, yaw and horizontal adjustments simplify projection positioning for image alignment. The HB64S mount also has positive registration lock so that the projector may be removed without losing projector mount registration.

Unpack carton and check contents:

- (1) Deluxe Ceiling Mount Housing Assembly
- (1) Sharp Mounting Bracket
- (4) M6 Flatwashers
- (4) M6 X 20mm Screws
- (4) 5/16" Flange Nuts
- (1) Allen Wrench

Installation Instructions

1. Turn your projector upside down.
2. Place the Sharp mounting bracket on the projector lining up the four mounting holes.


3. Place the (4) M6 flatwashers around the (4) 6M x 20mm screws and start until finger tight, then snug using the supplied Allen Wrench. **Securely tighten all four mounting bolts at this time.**

4. Be sure that the method of support you are using for the VCM ceiling mount is securely installed to the ceiling. If not, the ceiling must be reinforced. Improper installation may result in serious personal injury.

5. Attach the VCM housing to your method of support and tighten firmly so the VCM housing is square to the screen.

PRECAUTION: Installing a ceiling mount requires the presence of two persons familiar with mechanical installations. A third assistant is recommended.

6. With the help of your assistants, lift the projector and install it to the studs extending from the mounting plate. Be sure the Sharp mounting plate is seated in the slots prior to releasing hand from handles. Tighten securely using the flange 5/16" flange nuts.

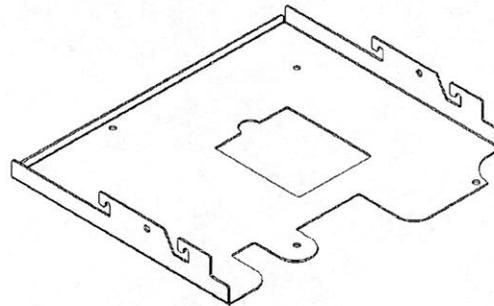

CAUTION: IMPROPER INSTALLATION MAY RESULT IN SERIOUS PERSONAL INJURY!

The overhead support **must** be capable of supporting **five times** the weight of the mount **and** equipment combined. If it cannot support this weight, the ceiling **must** be reinforced.

