
INSTALLATION INSTRUCTIONS

PLASMA DISPLAY STATIC MOUNT HPFM-4250A

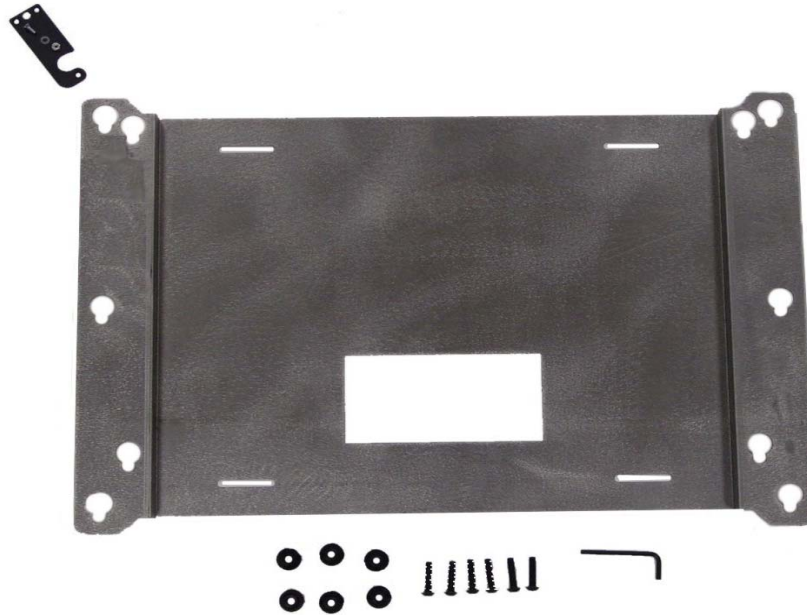


Figure 1

- | | |
|--|----------------------------------|
| (1) Bracket, Plasma Mounting, Static | (1) Latching Flag |
| (6) Screws, M8 x 35mm Button Head Cap | (1) 10-24 x .5 FH Undercut Screw |
| (6) Mounting Buttons, Nylon stepped, pan style | (1) Nylon Washer |
| (1) Allen Key, 5mm | (1) 10-24 Nylock Nut |

NOTE: Not all parts are used for every application.

BEFORE PROCEEDING: Unpack the carton, verify contents shown in Figure 1 and read installation instructions completely. If you are missing any of the listed components, please contact Technical Support at techsupport@lucetv.com.

CAUTION! PLASMA DISPLAYS ARE EXTREMELY FRAGILE.



S-Squared Technologies, LLC
954.385.3950 FAX 954. 385.3597
3355 Enterprise Ave., Ste.100, Weston, FL 33331

2003
www.lucetv.com
www.flatcentral.com
06/03

HPFM-4250A

50" Plasma Display

1. Attach six mounting buttons to display using six M8 x 35mm button head cap screws provided (see Figure 2).
2. Secure latching flag to Plasma Static Mount using one 10-24 x .5 FH undercut screw, one Nylon washer, and one 10-24 Nylock nut (See Figure 3).

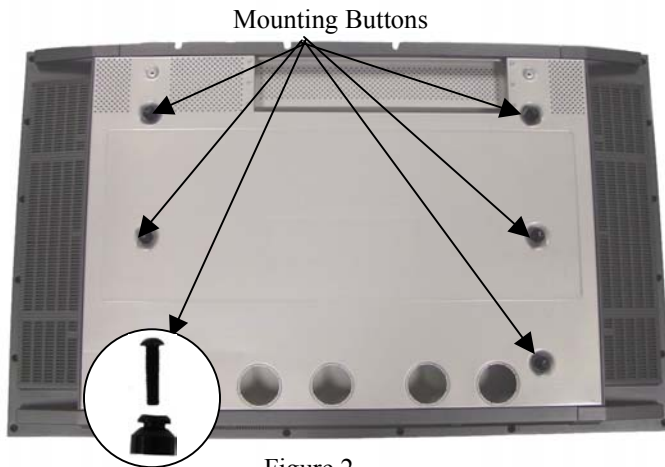


Figure 2

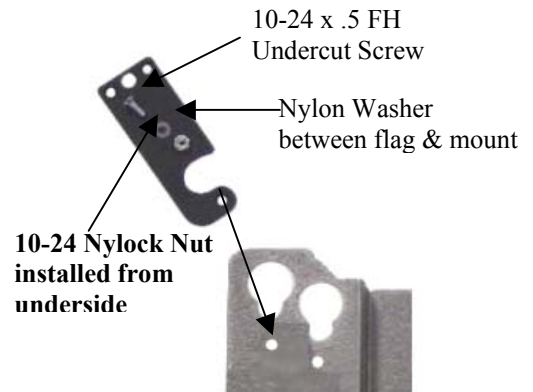


Figure 3

WARNING!

ALL COMPONENTS MUST BE SECURELY FASTENED TO A STRUCTURAL MEMBER CAPABLE OF SUPPORTING 4 TIMES THE COMBINED WEIGHT OF ALL COMPONENTS PLUS THE EQUIPMENT BEING MOUNTED. IF IT CANNOT SUPPORT THIS WEIGHT, THE STRUCTURE MUST BE REINFORCED. THE MAXIMUM WEIGHT TO BE INSTALLED ON THE MOUNT IS 150 POUNDS (68.04 KG).

3. Securely anchor plasma static mount to the wall using wall studs or supporting framework (see Figure 4).
4. Make sure the flag is lowered to the side before attempting to place the display on the mount.
5. With the aid of another person, lift the display up to the mount, align the mounting buttons on the display with the teardrop slots in the mount, and set the display into place (see Figure 4).
6. Position (raise) the flag to secure the display (see Figure 4)

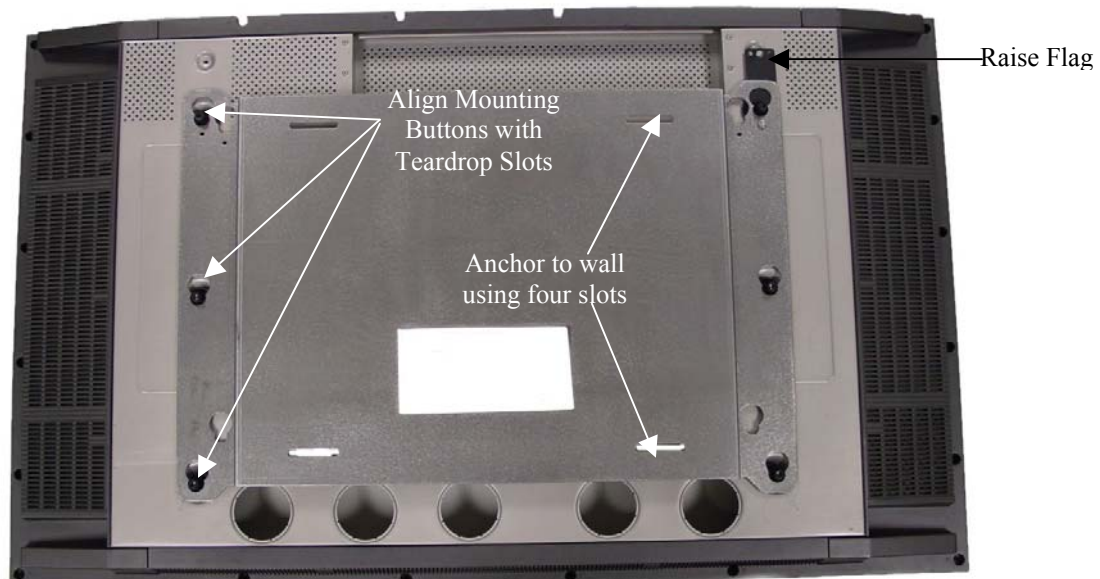


Figure 4

HPFM-4250A

42" Plasma Display

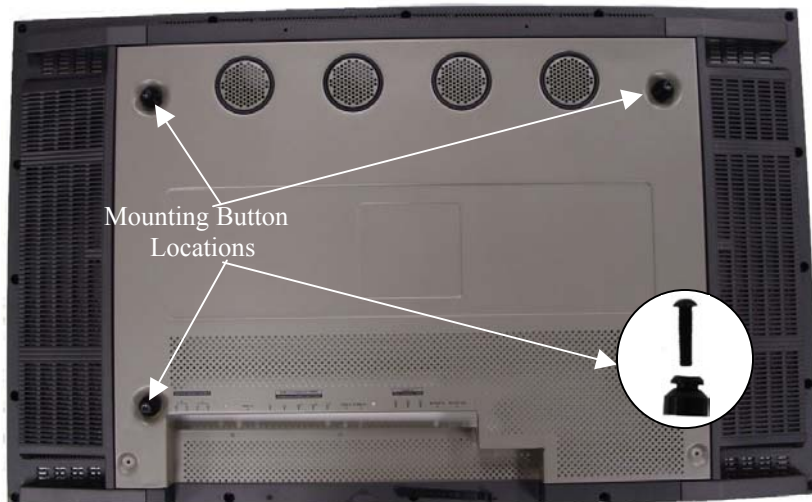


Figure 5

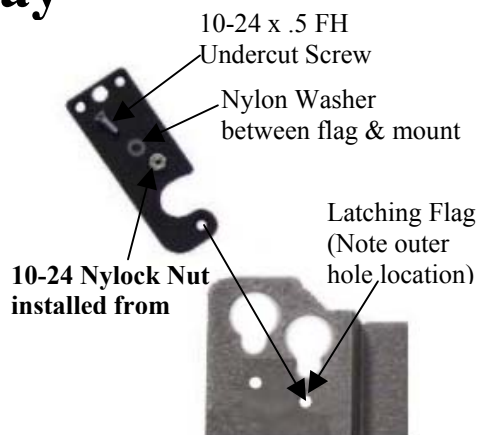


Figure 6

1. Attach four mounting buttons to display using four M8 x 35mm button head cap screws provided (see Figure 5).
2. Secure latching flag to Plasma Static Mount using one 10-24 x .5 FH undercut screw, one Nylon washer, and one 10-24 Nylock nut (see Figure 6).
3. Securely anchor the plasma static mount to the wall using wall studs or supporting framework (see Figure 7).

WARNING!

ALL COMPONENTS MUST BE SECURELY FASTENED TO A STRUCTURAL MEMBER CAPABLE OF SUPPORTING 4 TIMES THE COMBINED WEIGHT OF ALL COMPONENTS PLUS THE EQUIPMENT BEING MOUNTED. IF IT CANNOT SUPPORT THIS WEIGHT, THE STRUCTURE MUST BE REINFORCED. THE MAXIMUM WEIGHT TO BE INSTALLED ON THE MOUNT IS 150 POUNDS (68.04 KG).

4. Make sure the flag is lowered to the side before attempting to place the display on the mount.
5. With the aid of another person, lift the display up to the mount, align the mounting buttons on the display with the teardrop slots in the mount, and set the display into place.
6. Position (raise) the flag to secure the display.

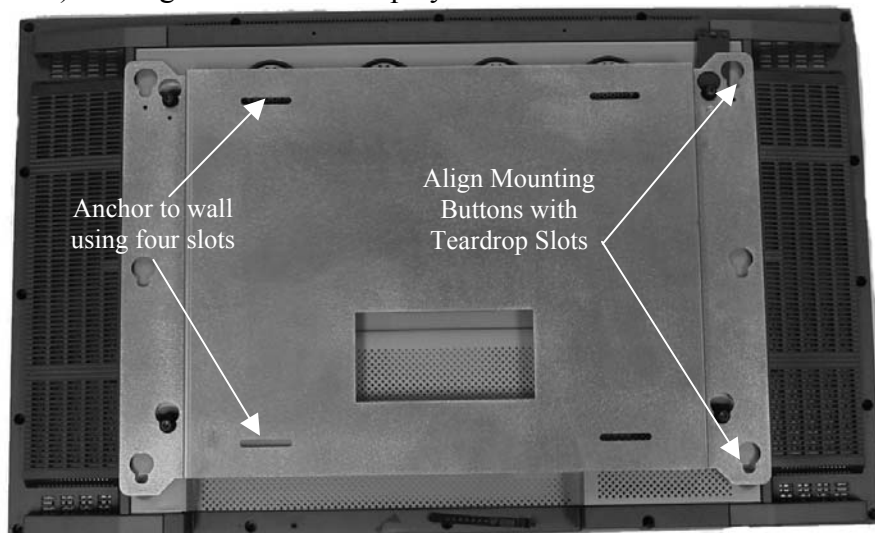


Figure 7