

INSTALLATION INSTRUCTIONS

LCDB BASE PLATE

Unpack carton and verify kit contents.



WARNING: IMPROPER INSTALLATION CAN LEAD TO EQUIPMENT FALLING CAUSING SERIOUS PERSONAL INJURY AND DAMAGE TO EQUIPMENT! DO NOT substitute hardware. Use only hardware supplied by manufacturer!




WARNING: The overhead support **MUST** be capable of supporting five times the combined weight of the mount and equipment. If it cannot, it must be reinforced!

The Chief® LCDB Base Plate is designed to support Chief® RPA and LCDA series mounts.

(1) Base plate with leveling feet

(1) Set screw, 5/16-18 x 3/8"

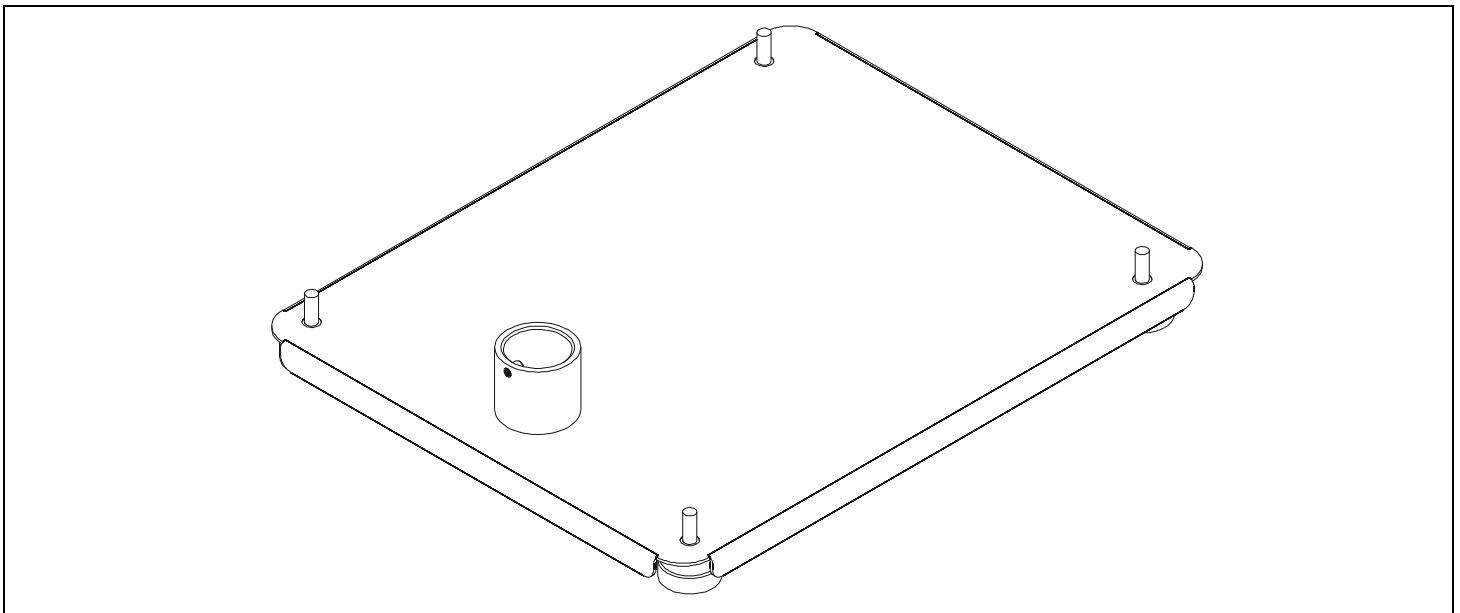

Installation:

1. Set the base plate on a clean, flat surface with the 1 1/2" pipe nipple facing up.
2. Adjust the feet, as necessary, to ensure a stable base.
3. Thread the 1 1/2" pipe section into the 1 1/2" pipe nipple.
4. Make sure the 1 1/2" pipe section is tightly secured into the 1 1/2" pipe nipple.



Milestone AV Technologies, and its affiliated corporations and subsidiaries (collectively, "Milestone"), intend to make this manual accurate and complete. However, Milestone makes no claim that the information contained herein covers all details, conditions or variations, nor does it provide for every possible contingency in connection with the installation or use of this product. The information contained in this document is subject to change without notice or obligation of any kind. Milestone makes no representation of warranty, expressed or implied, regarding the information contained herein. Milestone assumes no responsibility for accuracy, completeness or sufficiency of the information contained in this document.



Our Mounts. **Your Vision.**

Chief Manufacturing, a products division of Milestone AV Technologies
8401 Eagle Creek Parkway, Savage, MN 55378

• P: 800.582.6480 / 952.894.6280 • F: 877.894.6918 / 952.894.6918

8804-000062 Rev00
©2009 Milestone AV Technologies,
a Duchossois Group Company

7/31/09