



INSTALLATION INSTRUCTIONS

PSB-2392 LCD DISPLAY MOUNTING BRACKET

Prior to assembly, unpack carton completely and verify contents.

If you are missing any of the following components, please contact Customer Service at 1-800/582-6480

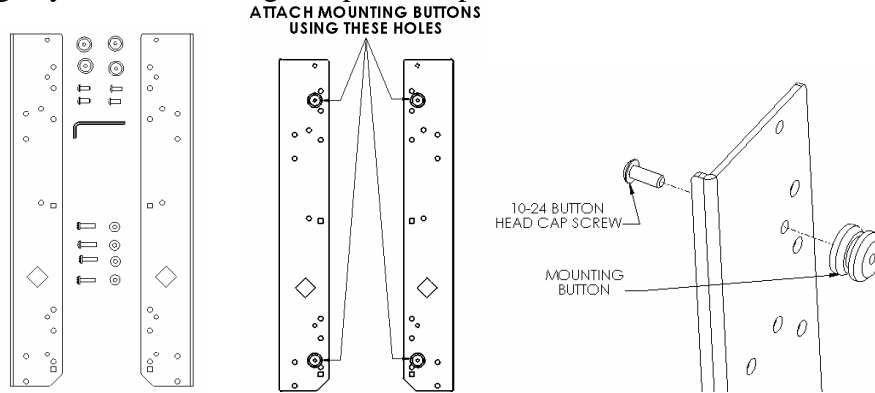


Figure 1

Figure 2

Figure 3

- (1) LCD Left Bracket
- (4) Mounting Buttons-Tapped 10-24
- (4) M5-.8 x 20mm Phillips Head Cap Screws
- (1) 1/8" Allen Key

- (1) LCD Right Bracket
- (4) 10-24 x .5" Button Head Cap Screws
- (4) 1/2(#10) x 3/8 RD Spacer Nylon

BEFORE PROCEEDING, READ INSTALLATION INSTRUCTIONS COMPLETELY

CAUTION! LCD DISPLAYS ARE EXTREMELY FRAGILE.

1. Using a 10-24 button head cap screw inserted from back side of bracket, secure mounting button, with chamfered hole of mounting button (larger surface) facing bracket, to bracket (four places) (see Figure 2 & Figure 3).
2. Remove existing mounting buttons from the back of the display.

NOTE: Holes for existing upper mounting buttons are not used for this bracket. Use the mounting holes above the existing upper mounting buttons for this bracket.

3. Place Nylon spacers on mounting holes, aligning square hole pattern on brackets with pattern on back of the display (see Figure 4 & Figure 5).
4. Using M5 screws, secure the brackets to the display. Do not over tighten screws.
5. With the aid of another person, lift the display up to the Chief Mount, aligning buttons of mounting brackets with slots in the Chief Mount.
6. Lower safety latch on the Chief Mount to secure the display, making sure latch is completely engaged.

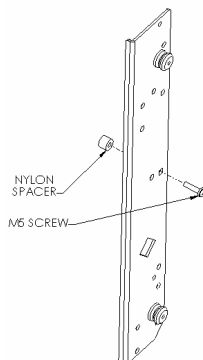


Figure 4

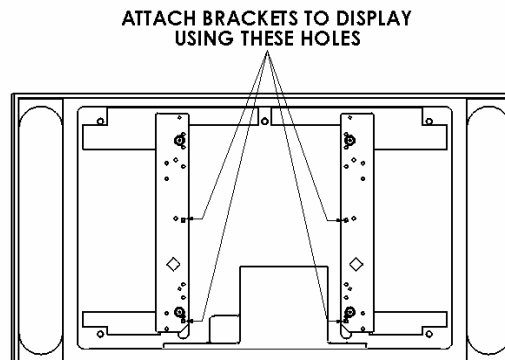


Figure 5