



INSTALLATION INSTRUCTIONS

PSB-111 PLASMA DISPLAY MOUNTING BRACKET

Prior to assembly, unpack carton completely and verify contents.
If you are missing any of the following components, please contact Customer Service at 1-800/582-6480

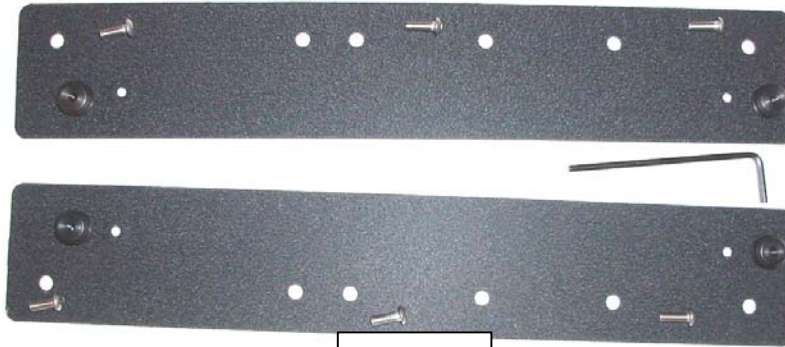


Figure 1

- (1) Plasma Static Mount Left Bracket
- (4) Mounting Buttons
- (6) M6 x 16 Button Head Cap Screw


- (1) Plasma Static Mount Right Bracket
- (4) 10-24 Flat head Cap Screws
- (1) 1/8" Allen Key
- (1) 4mm Allen Key

BEFORE PROCEEDING, READ INSTALLATION INSTRUCTIONS COMPLETELY


1. Using a 10-24 flat head cap screw inserted from chamfered hole side of bracket, secure mounting button, with chamfered hole of mounting button (larger surface) facing bracket, to bracket (four places). See Figure 1.
2. Align hole pattern on brackets with pattern on back of Plasma Display (see Figure 2).

CAUTION! PLASMA DISPLAYS ARE EXTREMELY HEAVY AND FRAGILE.

3. With the aid of another person, lift Plasma Display up to the Chief Mount, aligning buttons of mounting brackets with slots in the Chief Mount.
4. Lower safety catch on the Chief Mount to secure Plasma Display, making sure catch is completely engaged.

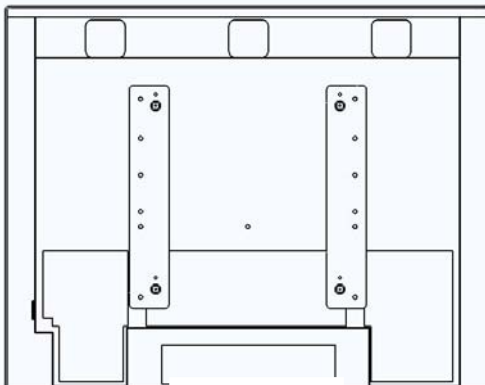

Hitachi 41"

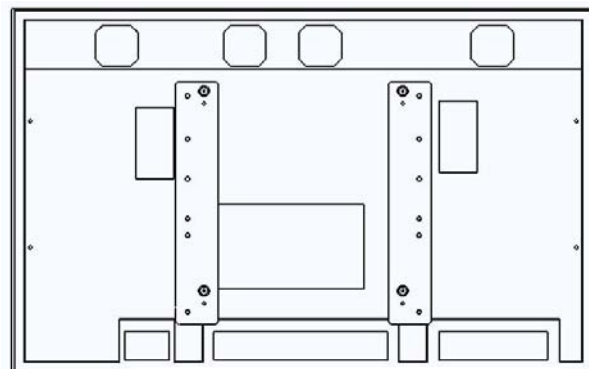

All other current Hitachi models

Figure 2