


## INSTALLATION INSTRUCTIONS

# PSB-2045 LCD DISPLAY MOUNTING BRACKET

Prior to assembly, unpack carton completely and verify contents.

If you are missing any of the following components, please contact Customer Service at 1-800/582-6480

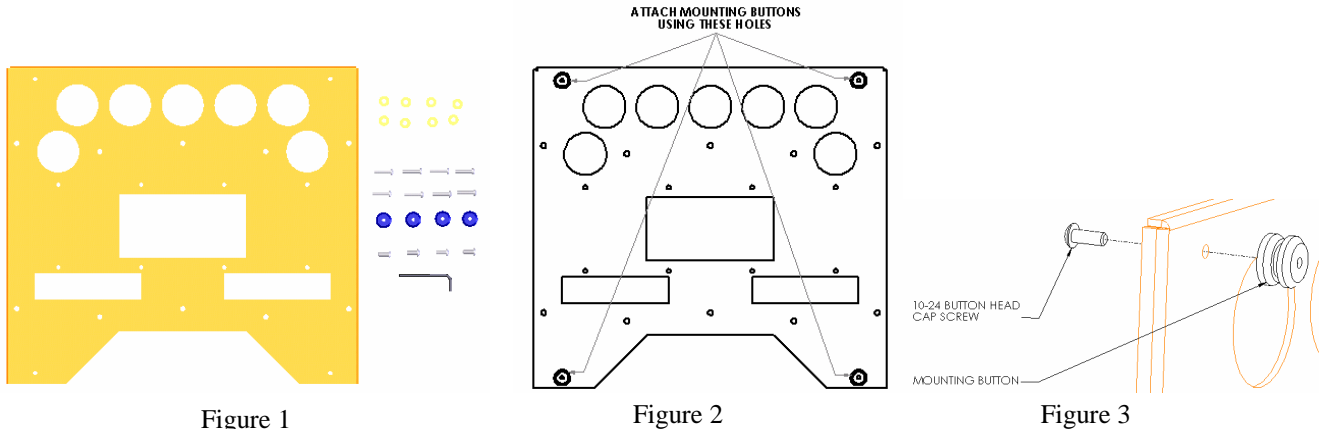

- |   |  |
|---|--|
| (1) LCD Interface Bracket                     | (4) Mounting Buttons-Tapped 10-24        |
| (4) 10-24 x .5" Button Head Cap Screws        | (6) M6-1.0 x 20mm Button Head Cap Screws |
| (6) .320 ID x 1/2 OD x 1/4 Round Nylon Spacer | (1) 1/8" Allen Key                       |
| (1) 4mm Allen Key                             |  |

BEFORE PROCEEDING, READ INSTALLATION INSTRUCTIONS COMPLETELY

## CAUTION! LCD DISPLAYS ARE EXTREMELY FRAGILE.

- Using a 10-24 button head cap screw inserted from back side of bracket, secure mounting button, with chamfered hole of mounting button (larger surface) facing bracket, to bracket (four places) (see Figure 2 & Figure 3).
- Place Nylon spacers on mounting holes, aligning hole pattern on brackets with pattern on back of LCD Display (see Figure 4 & Figure 5). If screen has threaded standoffs on back, do not use Nylon spacers. Attach bracket directly to standoffs (see Figure 6).
- Using M6 button head screws, secure brackets to display. Do not over tighten screws.
- With the aid of another person, lift LCD Display up to the Chief Mount, aligning buttons of mounting brackets with slots in the Chief Mount.
- Lower safety latch on the Chief Mount to secure LCD Display, making sure latch is completely engaged.

