



## INSTALLATION INSTRUCTIONS

# PSB-2154 LCD DISPLAY MOUNTING BRACKET

Prior to assembly, unpack carton completely and verify contents.

If you are missing any of the following components, please contact Customer Service at 1-800/582-6480

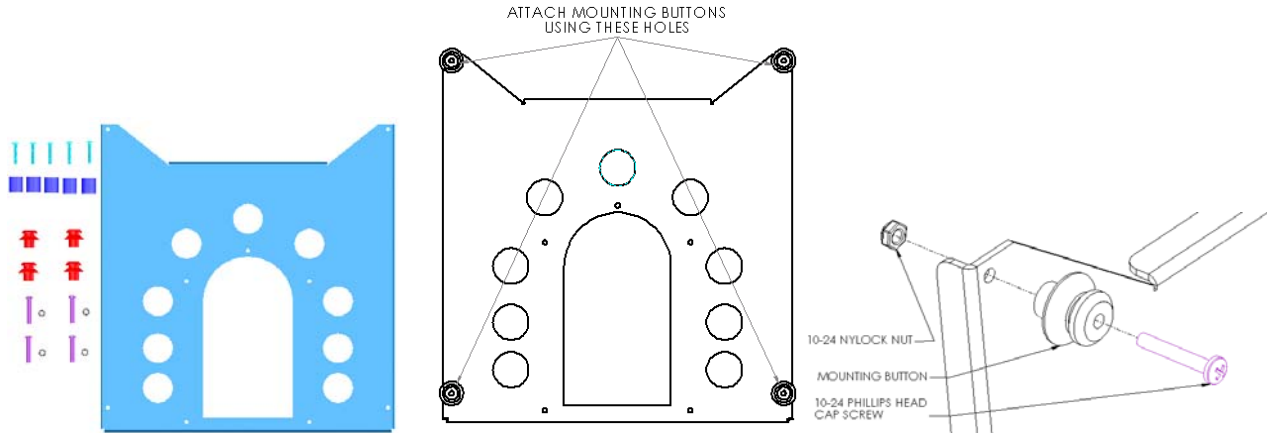


Figure 1

Figure 2

Figure 3

- (1) LCD Bracket
- (4) 10-24 x 1.25" Phillips Head Cap Screws
- (5) M4 x 35mm Phillips Head Cap Screws (longer of the two Phillips Head Cap Screws)
- (4) Mounting Buttons-Black Nylon
- (4) 10-24 Nylock Nuts
- (5) 8.3mm ID x 18mm OD x 20mm Nylon Spacers

BEFORE PROCEEDING, READ INSTALLATION INSTRUCTIONS COMPLETELY

## CAUTION! LCD DISPLAYS ARE EXTREMELY FRAGILE.

1. Using a 10-24 Phillips head cap screw (shorter of the two sets of Phillips head screws) and Nylock nut, secure mounting button to bracket (four places) (see Figure 2 & Figure 3).
2. Place Nylon spacers on mounting holes, aligning hole pattern on brackets with pattern on back of LCD Display (see Figure 4 & Figure 5).
3. Using M4 screws, secure brackets to display. Do not over tighten screws.
4. With the aid of another person, lift LCD Display up to the Chief Mount, aligning buttons of mounting brackets with slots in the Chief Mount.
5. Lower safety latch on the Chief Mount to secure LCD Display, making sure latch is completely engaged.

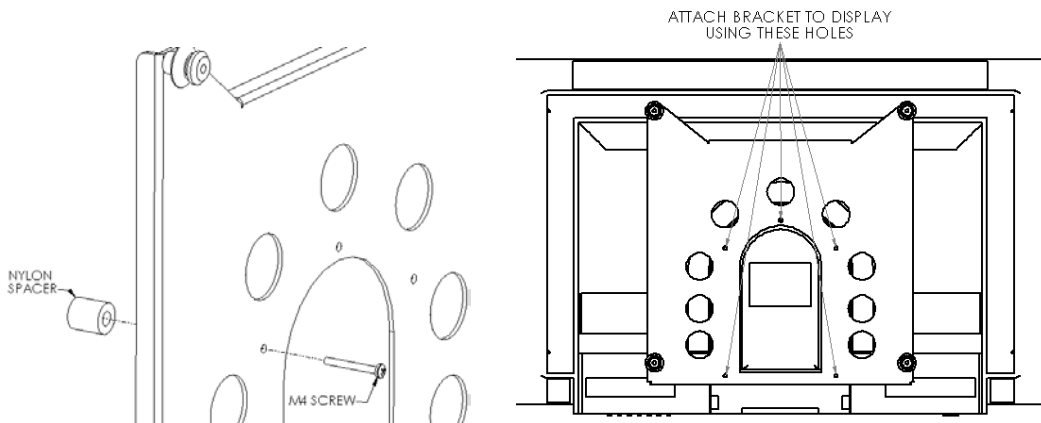


Figure 4

Figure 5