



INSTALLATION INSTRUCTIONS

PSB-2300/2301 LCD DISPLAY MOUNTING BRACKET

Prior to assembly, unpack carton completely and verify contents.
If you are missing any of the following components, please contact Customer Service at 1-800/582-6480



Figure 1




Figure 2

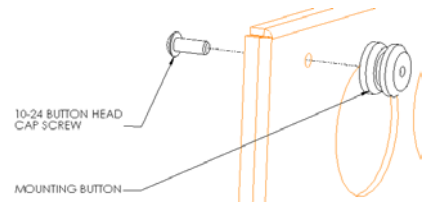


Figure 3

- (1) LCD Interface Bracket
- (4) 10-24 x .5" Button Head Cap Screws
- (8) .219 ID x 1/2 OD x 1/4 Round Nylon Spacer
- (4) Mounting Buttons-Tapped 10-24
- (8) M4 x 20mm Phillips Head Cap Screws
- (1) 1/8" Allen Key

**PSB-2301 only uses four M4 Screws and Nylon spacers

BEFORE PROCEEDING, READ INSTALLATION INSTRUCTIONS COMPLETELY

CAUTION! LCD DISPLAYS ARE EXTREMELY FRAGILE.

- Using a 10-24 button head cap screw inserted from back side of bracket, secure mounting button, with chamfered hole of mounting button (larger surface) facing bracket, to bracket (4 places) (see Figure 2 & Figure 3).
- Place Nylon spacers on mounting holes, aligning hole pattern on brackets with pattern on back of LCD Display (see Figure 4 & Figure 5). PSB-2300 uses 8 screws and spacers and PSB-2301 only uses 4.
- Using M4 Phillips head screws, secure brackets to display. Do not over tighten screws.
- With the aid of another person, lift LCD Display up to the Chief Mount, aligning buttons of mounting brackets with slots in the Chief Mount.
- Lower safety latch on the Chief Mount to secure LCD Display, making sure latch is completely engaged.

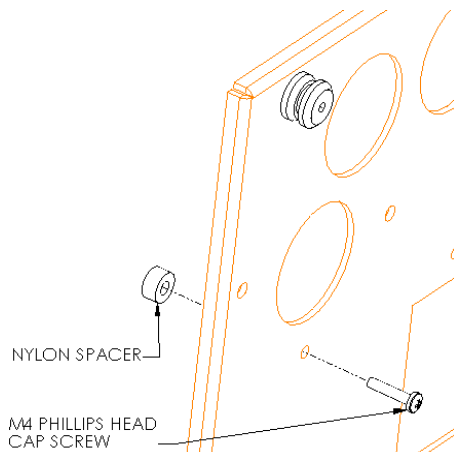


Figure 4

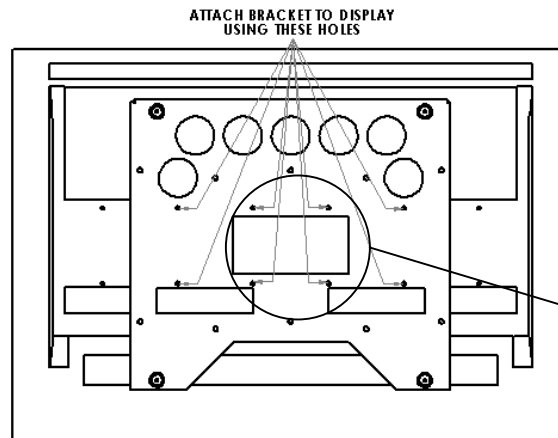


Figure 5

** PSB-2301
ONLY USES
THE 4 CENTER
HOLES ON THE
BRACKET