
INSTALLATION INSTRUCTIONS

PLASMA DISPLAY STATIC MOUNT PSM-2091 & PSM-2092

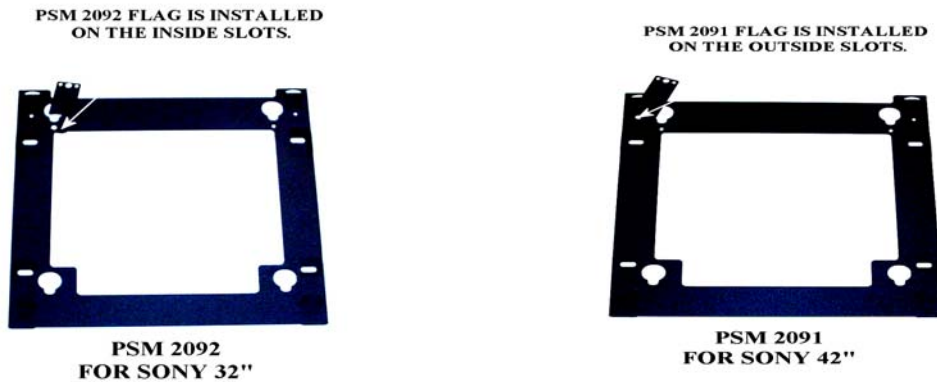


Figure 1

(1) Plasma Static Mount
(1) Latching Flag
(1) Nylon Washer .50 OD x .313 ID x .03

(1) 10-24 x .5 FH Socket Screw
(1) 10-24 Nylock Nut

BEFORE PROCEEDING: Unpack the carton, verify contents shown in Figure 1 and read installation instructions completely. If you are missing any of the listed components, please contact Customer Service at 1-800/582-6480.

CAUTION! Plasma Displays are Extremely Fragile.

1. Mount plasma static mount onto wall utilizing wall studs or supporting framework. The mount, when anchored in place, must be capable of supporting 4 times the weight of the plasma and mount.
2. Using a 10-24 x .5 FH undercut screw, Nylon washer between safety latch and mount, and 10-24 Nylock nut, install the safety latch loose enough to move but tight enough to remain in place when raised.



CHIEF MANUFACTURING INC.
1-800-582-6480 952-894-6280 FAX 952-894-6918
8401 EAGLE CREEK PKWY, STE 700
SAVAGE, MINNESOTA 55378 USA

2003 Chief Manufacturing
www.chiefmfg.com
08/04

WARNING!

ALL COMPONENTS MUST BE SECURELY FASTENED TO A STRUCTURAL MEMBER CAPABLE OF SUPPORTING 4 TIMES THE COMBINED WEIGHT OF ALL COMPONENTS PLUS THE EQUIPMENT BEING MOUNTED. IF IT CANNOT SUPPORT THIS WEIGHT, THE STRUCTURE MUST BE REINFORCED. THE MAXIMUM WEIGHT TO BE INSTALLED ON THE MOUNT IS 175 POUNDS (79.38KG).

3. Turn latching flag to the side prior to placing plasma in place.
4. With the aid of another person, lift plasma display up to the Chief mount, aligning mounting buttons with the teardrop slots dependent upon the model plasma, the inside slots are for the Sony 32" and the outside slots are for the Sony 42", and setting into place (see Figure 2).

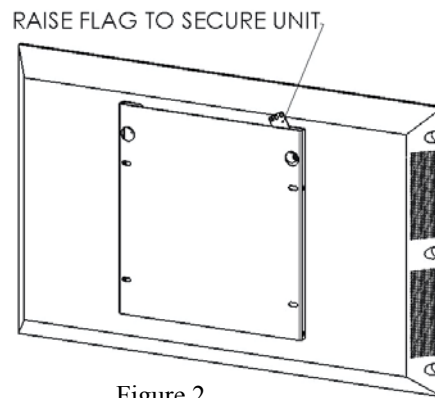


Figure 2

5. Raise safety latch to secure plasma in place.