

INSTALLATION INSTRUCTIONS

PLASMA DISPLAY STATIC MOUNT

PSM-2111



Figure 1

- | | |
|-----------------------------|---------------------------------------|
| (1) Plasma Static Mount | (1) 10-24 x .5 FH Undercut Screw |
| (1) Latching Flag | (1) 10-24 Nylock Nut |
| (6) Mounting Buttons-Silver | (1) Washer, Nylon |
| | (6) M6 x 25mm Phillip Head Cap Screws |

BEFORE PROCEEDING: Unpack the carton, verify contents shown in Figure 1 and read installation instructions completely. If you are missing any of the listed components, please contact Customer Service at 1-800/582-6480.

CAUTION! PLASMA DISPLAYS ARE EXTREMELY FRAGILE.

1. Secure latching flag to the inside mounting hole of the mount using the 10-24 x .5 FH undercut screw, Nylon washer, and 10-24 Nylock nut (see Figure 2). Tighten until friction will hold the flag in place.
2. Attach mounting buttons to plasma using six M6 x 25 cap screws (see Figure 3 and Figure 4).

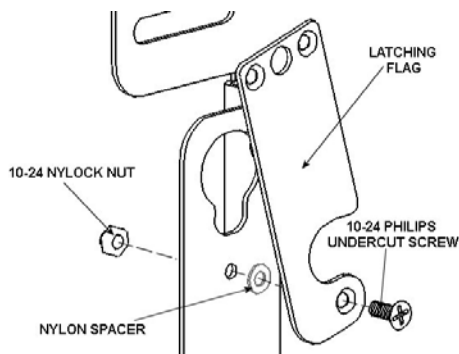


Figure 2




Figure 3

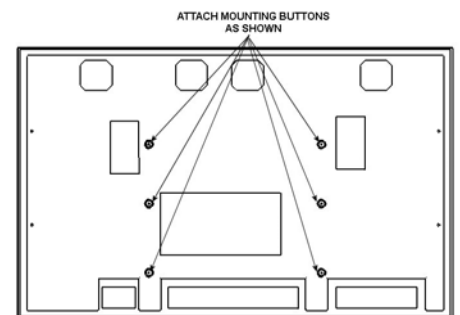


Figure 4



CHIEF MANUFACTURING INC.
1-800-582-6480 952-894-6280 FAX 952-894-6918
8401 EAGLE CREEK PARKWAY, STE. 700
SAVAGE, MINNESOTA 55378 USA

8805-00046 RevC
2003 Chief Manufacturing
www.chiefmfg.com

08/04

WARNING!

ALL COMPONENTS MUST BE SECURELY FASTENED TO A STRUCTURAL MEMBER CAPABLE OF SUPPORTING 4 TIMES THE COMBINED WEIGHT OF ALL COMPONENTS PLUS THE EQUIPMENT BEING MOUNTED. IF IT CANNOT SUPPORT THIS WEIGHT, THE STRUCTURE MUST BE REINFORCED.

THE MAXIMUM WEIGHT TO BE INSTALLED ON THE MOUNT IS 175 POUNDS (79.38 KG).

3. Securely anchor the plasma static mount to wall using wall studs or supporting framework (see WARNING).
4. Make sure the flag is lowered to the side before attempting to place the plasma on the mount.
5. With the aid of another person, lift the plasma display up to the mount, align the mounting buttons on the plasma with the teardrop slots in the mount, and set the plasma into place (see Figure 4).
6. Position (raise) the latch to secure the plasma.