




INSTALLATION INSTRUCTIONS

PSM-2281

PLASMA STATIC MOUNT

Prior to assembly, unpack carton completely and verify contents.

If you are missing any of the following components, please contact Customer Service at 1-800/582-6480



- (1) Plasma Static Mount
- (1) 10-24 Nylock Nut
- (1) 10-24 x .5 Undercut FH Screw
- (1) Nylon Washer .032 Thick

Figure 1

- (1) Latching Flag
- (6) Mounting Buttons-Chrome
- (6) M6 x 30mm Slot Head Cap Screws
- (6) Nylon Spacers .5 x .26 x .1875

BEFORE PROCEEDING, READ INSTALLATION INSTRUCTIONS COMPLETELY

CAUTION! PLASMA DISPLAYS ARE HEAVY AND EXTREMELY FRAGILE.

1. Attach latching flag to mount using the 10-24 Phillips head screw, the nylon washer, and the 10-24 Nylock nut (see Figure 2). Tighten until friction will hold the flag in place.
2. Attach mounting buttons to plasma using the six M6 x 30 screws and the Nylon spacers provided (see Figures 3 & Figure 4).
3. Mount plasma static mount onto wall using wall studs or supporting framework. The mount, when anchored in place, must be capable of supporting 4 times the weight of the plasma and mount.
4. With the aid of another person, lift plasma display up to the Chief mount, aligning mounting buttons with the teardrop slots and setting into place.
5. Raise safety latch to secure plasma (see Figure 5).

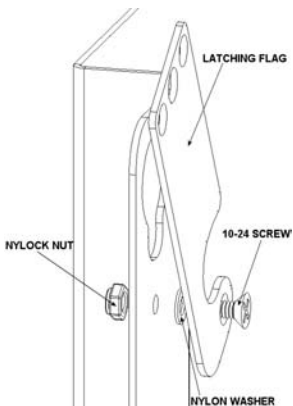


Figure 2

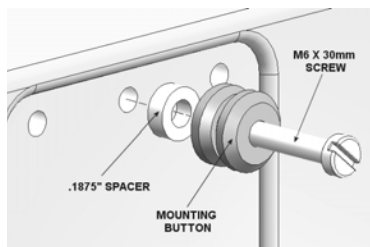


Figure 3

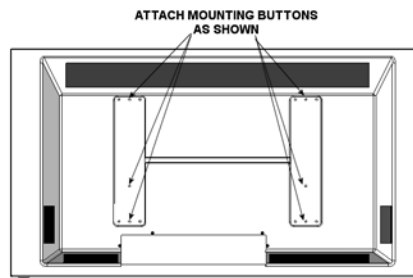


Figure 4

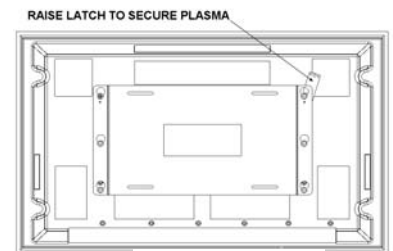


Figure 5