




INSTALLATION INSTRUCTIONS SLB-013 HANGER BRACKET for VPL-HS2,

Prior to assembly, unpack carton and verify contents.

For security installation, use security hardware package inside the ALL-POINTS™ Security Kit. Follow the instructions below for attaching the bracket to the projector using either standard hardware or security hardware.

If you are missing any of the following components, please contact Customer Service at 1-800-582-6480

- | | | | |
|-----|--------------------|-----|--------------------------------------|
| (1) | SLB-013 Bracket | (4) | M5 -16mm Philips Counter Sink Screws |
| (4) | 10 - 24 Thumb Nuts | (4) | 1/2" x .260 x 3/16" Nylon Spacer |



INSTALLATION INSTRUCTIONS

1. Turn projector upside down.
2. Remove the base of the projector as seen in fig 1 by squeezing the two white tabs and lifting the base off. Now you can remove the four Philips screws as seen in fig 2 holding the rest of the base on. Then lift off the rest of the base to expose the four mounting holes as seen in fig 3.
3. Place the four 3/16" nylon spacers over the four threaded inserts in the bottom of the projector.
4. Place the SLB-013 bracket onto the four 3/16" nylon spacers on the bottom of the projector lining up the four mounting holes in the bracket with the four nylon spacers.
5. Using the four M5 x 16mm screws start them into the four threaded inserts and tighten all fasteners at this time, securing the bracket to the projector. **CAUTION: When attaching the mount be careful not to overtighten screws.**
6. See RPA and/or Smart-Lift™ Instructions.

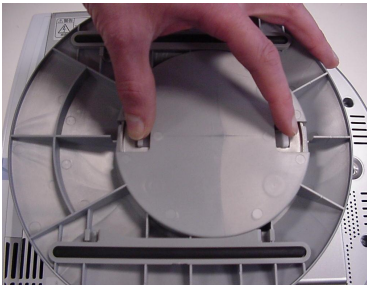


Fig 1.

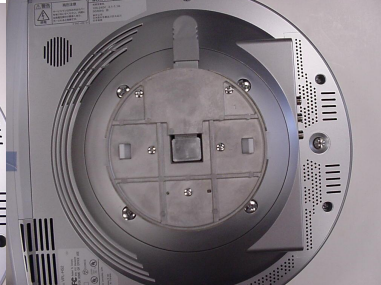


Fig 2.

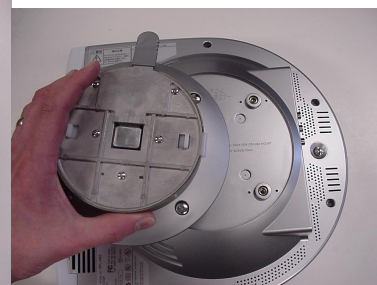


Fig 3.