




## INSTALLATION INSTRUCTIONS

### SLB-1120 HANGER BRACKET

for Toshiba TLP-x10, TLP-X11, TLP-X20, TLP-X21,

Prior to assembly, unpack carton and verify contents.  
For security installation, use security hardware package inside the ALL-POINTS™ Security Kit. Follow the instructions below for attaching the bracket to the projector using either standard hardware or security hardware.  
If you are missing any of the following components, please contact Customer Service at 1-800-582-6480

- |     |                  |     |                    |
|-----|------------------|-----|--------------------|
| (1) | SLB-1120 Bracket | (4) | 10 - 24 Thumb Nuts |
| (2) | M4 - 10mm Screws | (2) | M4 Flatwashers     |
| (2) | M3 - 6mm Screws  | (2) | M3 Flatwashers     |
| (4) | Rubber Bump-on   |     |                    |

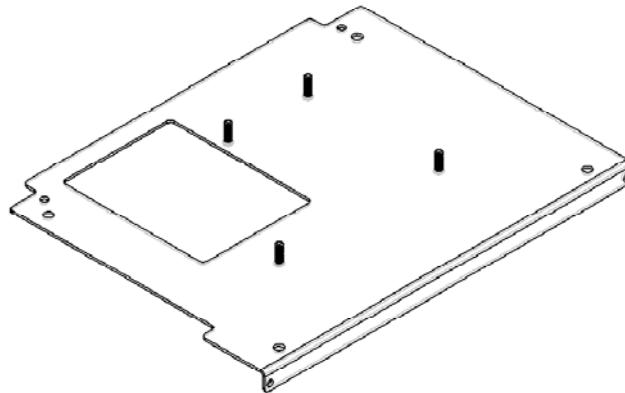

### INSTALLATION INSTRUCTIONS

1. Turn projector upside down.
2. Using the four-rubber bump-on's, push them through the four larger holes in the bracket from the side with the inside bend.
3. Place the SLB-1120 bracket on to the bottom of the projector lining up the four mounting holes in the SLB-1120 bracket with the four threaded inserts in the bottom and back of the projector and secure using the two M4 -10mm mounting screws and M4 Flatwashers on the bottom holes and the two M3 -6mm mounting screws and M3 Flatwashers on the back holes. Only tighten screws until the rubber bump-on's start to slightly deform.  
**CAUTION: When attaching the mount be careful not to overtighten screws.**
4. See RPA and/or Smart-Lift™ Instructions.