



INSTALLATION INSTRUCTIONS SLB-132 HANGER BRACKET


for Hewlett-Packard MP3130, MP3130W, MP3135, MP3135W,

Prior to assembly, unpack carton and verify contents.

For security installation, use security hardware package inside the ALL-POINTS™ Security Kit. Follow the instructions below for attaching the bracket to the projector using either standard hardware or security hardware.

If you are missing any of the following components, please contact Customer Service at 1-800-582-6480

- | | | | |
|-----|--------------------|-----|--------------------------------|
| (1) | SLB-132 Bracket | (1) | ¼ – 20 X ¼” Philips Pan Screws |
| (3) | 10 - 24 Thumb Nuts | (1) | ¼” Flatwasher |

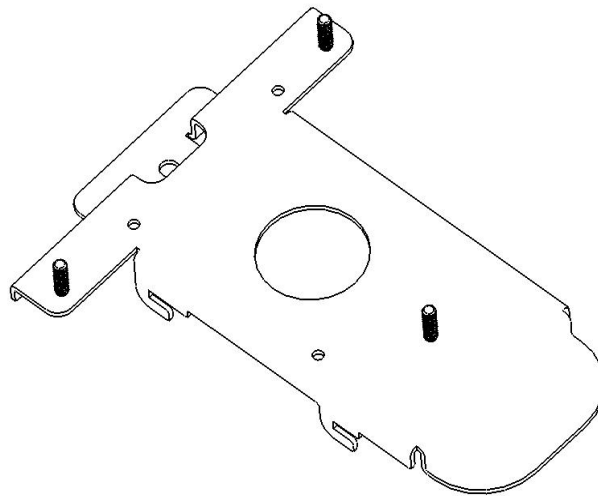

INSTALLATION INSTRUCTIONS

1. Place your projector on a table and push the button so the balancing legs will release and extend out the sides well leaving the main leg retracted flat.
2. Hold your projector upside down on your lap.
2. Place the bracket on the projector so hole is toward the rear of the projector and the four hooking tabs are pointing forward.
3. Line-up the four hooking tabs with the balancing legs and slide the SLB132 forward until the hooks are fully set onto place.
4. Using the ¼ -20 X ¼” long screw provided, start this into the threaded insert and tighten this screw at this time, securing the bracket to the projector. **CAUTION: When attaching the mount be careful not to over tighten the screw.**
5. See RPA and/or Smart-Lift™ Instructions.