




INSTALLATION INSTRUCTIONS

SLB-155 HANGER BRACKET

for NEC LT154, LT155, LT156, LT157

Prior to assembly, unpack carton and verify contents.
For security installation, use security hardware package inside the ALL-POINTS™ Security Kit. Follow the instructions below for attaching the bracket to the projector using either standard hardware or security hardware.
If you are missing any of the following components, please contact Customer Service at 1-800-582-6480

- | | | | |
|-----|-------------------------------|-----|----------------------------------|
| (1) | SLB-155 Bracket | (2) | M4 - 12mm Pan Screws |
| (4) | 10 - 24 Thumb Nuts | (2) | M4 Flatwashers |
| (1) | M4 - 12mm Countersink Screw | (1) | ½" x .258" x 3/16" Nylon Spacers |
| (2) | ½" x .218" x ¼" Nylon Spacers | | |

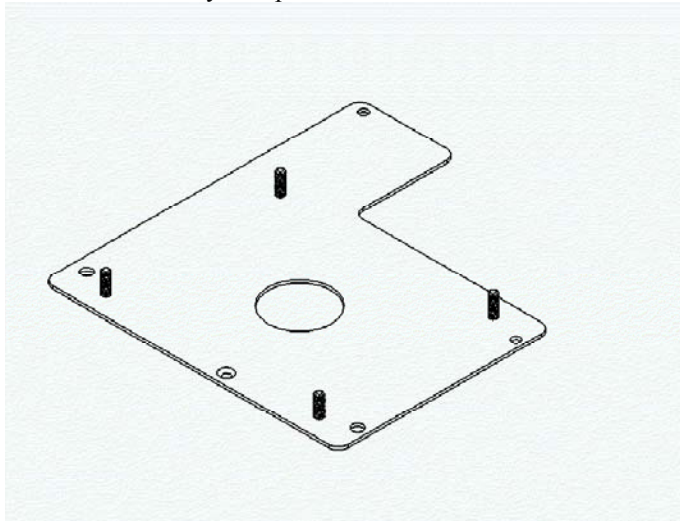

INSTALLATION INSTRUCTIONS

1. Turn projector upside down.
2. Place the ½" tall nylon spacer over the front threaded insert in the projector and one of the two 3-16" tall nylon spacers over the other two remaining mounting holes in the projector.
3. Place the SLB-155 bracket onto the nylon spacers in the bottom of the projector lining up the three mounting holes in the SLB-155 bracket with the three threaded inserts in the bottom of the projector and secure using the two M4 -12mm mounting screws and M4 Flatwashers in the center and rear mounting holes and the M4 -12mm flat head screw in the front center mounting hole. **CAUTION: When attaching the SLB -155 mount be careful not to overtighten screws so you twist the projector housing out of square, the screws may need to have a space between the bracket and the projector housing.**
4. See RPA and/or Smart-Lift™ Instructions.