



INSTALLATION INSTRUCTIONS SLB-3131 HANGER BRACKET


for Philips b-Sure, SV1, XG1, LC-3131, LC-3141,

Prior to assembly, unpack carton and verify contents.

For security installation, use security hardware package inside the ALL-POINTS™ Security Kit. Follow the instructions below for attaching the bracket to the projector using either standard hardware or security hardware.

If you are missing any of the following components, please contact Customer Service at 1-800-582-6480

- | | | | |
|-----|----------------------|-----|-----------------------------------|
| (1) | SLB-3131 Bracket | (1) | # 8 - 32 x 1/2" Philips Pan Screw |
| (1) | SLB-3131 Locking Tab | (4) | # 10 - 24 Thumb Nuts |

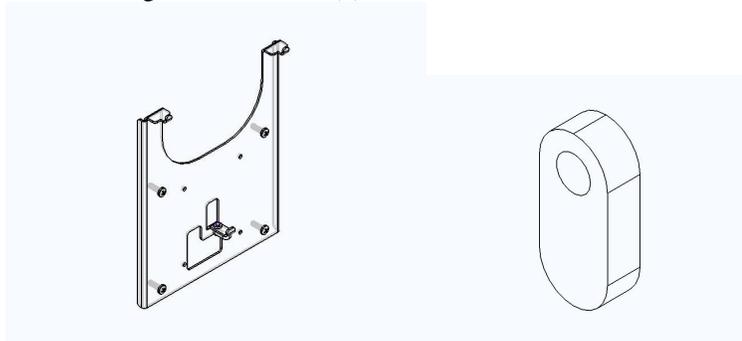

SLB-3131 Bracket

SLB-3131 Locking Tab

INSTALLATION INSTRUCTIONS

1. Turn your projector upside down.
2. Locate the two-rear rubber pads as seen in Fig. A, cut the small tab on each rear pad so they can push down into the mounting slots.
3. Locate the front adjustable foot as seen in Fig. B, cut the two small tabs on the front center mounting slot so it can push down into the mounting slot.



Fig. A

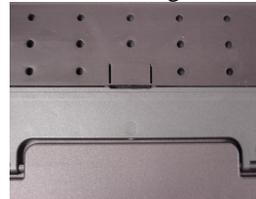


Fig. B

4. Line-up the two rear and one front tabs of the SLB-3131 mounting bracket with the two rear and one front mounting slots in the projector. Insert the bracket tabs down into the mounting slot and slide the bracket back toward the rear of the projector as seen in Fig. C, D and E.



Fig. C

Fig. D

Fig. E

5. Find the SLB-3131 locking tab in the hardware bag, Place the locking tab through the front opening in the mounting bracket and lay it on it's side as seen in Fig. F.
6. Using a screwdriver to assist you, slide the locking tab too the left and push the end of the locking tab without the hole down into the mounting slot in front of the front mounting tab on the bracket as seen in Fig. G.
7. Using your screwdriver line-up the hole in the Locking tab with the treaded hole on the SLB-3131 front mounting tab as seen in Fig. H.

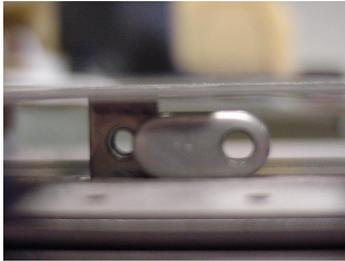


Fig. F

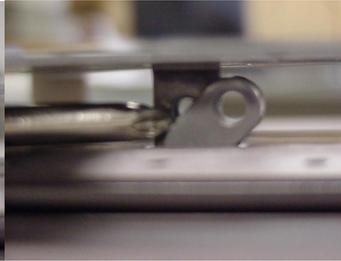


Fig. G

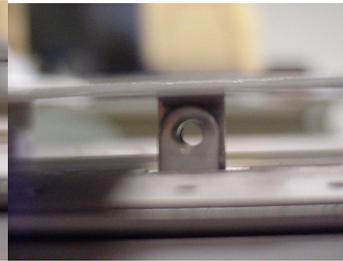


Fig. H

8. Find the #8 - 32 x 3/8" locking tab screw in the hardware bag, using a screw driver place the # 8 screw through the hole in the locking tab and tighten the screw at this time, securing the bracket to the projector as seen in fig. I, J and K. **CAUTION: When attaching the tab to the mount be careful not to overtighten the screw.**



Fig. I



Fig. J



Fig. K

9. See RPA and/or Smart-Lift™ Instructions.

