



INSTALLATION INSTRUCTIONS SLB-415 HANGER BRACKET For Proxima A2

Prior to assembly, unpack carton and verify contents.

If you are missing any of the following components, please contact Customer Service at 1-800/582-6480

- | | | | | |
|-----|---------------------|----------|-----|-----------------------|
| (1) | SLB-415 Plate Left | Fig. # 1 | (5) | Thumb Nuts |
| (1) | SLB-415 Plate Right | Fig. # 2 | (4) | Felt Squares (1"x 1") |

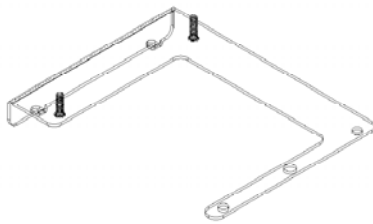


Fig. # 1

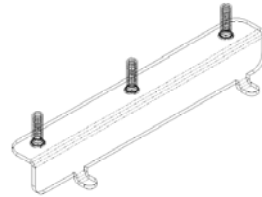


Fig. # 2

INSTALLATION INSTRUCTIONS

1. Turn projector upside down.
2. Locate the four square mounting slots in the bottom of the projector.
3. Take the right bracket (Fig. # 2) and insert the two mounting tabs into the two square mounting slots.
4. Take the left Bracket (Fig. # 1) and insert the two mounting tabs into the two square mounting slots, as you lower the bracket the three mounting studs in the right bracket should protrude through the mounting holes in the left bracket.
5. Using one of the thumbnuts, screw and tighten the center thumbnut to the center-mounting stud.
6. Start the four existing thumbnuts onto the mounting studs leaving them loose until you are ready to mount on the RPA bracket.
7. **CAUTION: When attaching the mount carefully insert the tabs into the projector and slowly lower, do not force the bracket down it should inset very easily. NOTE: Felt squares are provided to protect projector shell, if desired. They can be attached to the projector or wrapped around the mount so it is between the mount and the projector.**
8. See RPA/Smart-Lift™ Instructions.

