




SLB-4200 HANGER BRACKET
FOR EIKI LC 4000, 4200, 4300; SANYO 500, 510, 550; BOXLIGHT 3026

Prior to assembly, unpack carton and verify contents.
For security installation, use security hardware package inside the ALL-POINTS™ Security Kit. Follow the instructions below for attaching the bracket to the projector using either standard hardware or security hardware.
If you are missing any of the following components, please contact Customer Service at 1-800-582-6480

- | | | | |
|-----|-------------------|-----|-----------------|
| (1) | SLB-4200 Plate | (2) | U-Form Rods |
| (4) | 10-24 Nylock Nuts | (4) | #10 Flatwashers |
| (8) | Felt Squares | (6) | Thumb Nuts |

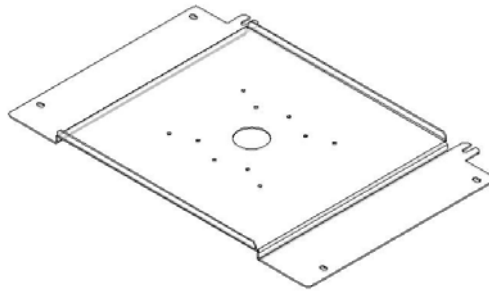

INSTALLATION INSTRUCTIONS

1. Turn projector upside down.
2. Bracket should be centered on projector. Attach the U-Form rods around the projector and up through the holes in the SLB-4200 plate, secure firmly using the #10 flatwashers and 10-24 nylock nuts. **NOTE: Felt squares are provided to protect projector shell, if desired. They can be attached to the projector or wrapped around the U-Form rod.**
3. See RPA/Smart-Lift™ Instructions.