

# INSTALLATION INSTRUCTIONS

## SSB-238, SSM-238, SLB-238 and SLM-238 Interface Brackets


SSB-238, SSM-238, SLB-238 and SLM-238 Interface Brackets are designed for use with Chief® Series Projector Mounts. See the specific installation instructions provided with the mount for additional installation information.

Unpack carton and verify kit contents. If any listed parts are missing, immediately contact a Chief Customer Service representative.



**WARNING: IMPROPER INSTALLATION CAN LEAD TO EQUIPMENT FALLING CAUSING SERIOUS PERSONAL INJURY AND DAMAGE TO EQUIPMENT! DO NOT substitute hardware. Use only hardware supplied by manufacturer!**

- |                              |   |
|------------------------------|---|
| (1) Interface Bracket Top    | (2) Screw, Phillips Pan Head, Machine, 10-24 x 3/8" |
| (1) Interface Bracket Bottom | (4) Bumper, RPA Spacer                              |
| (4) 10-24 Thumb Nuts **      | (1) 5/32" Security Hex Key                          |
| (1) All-Points Security Kit  |   |

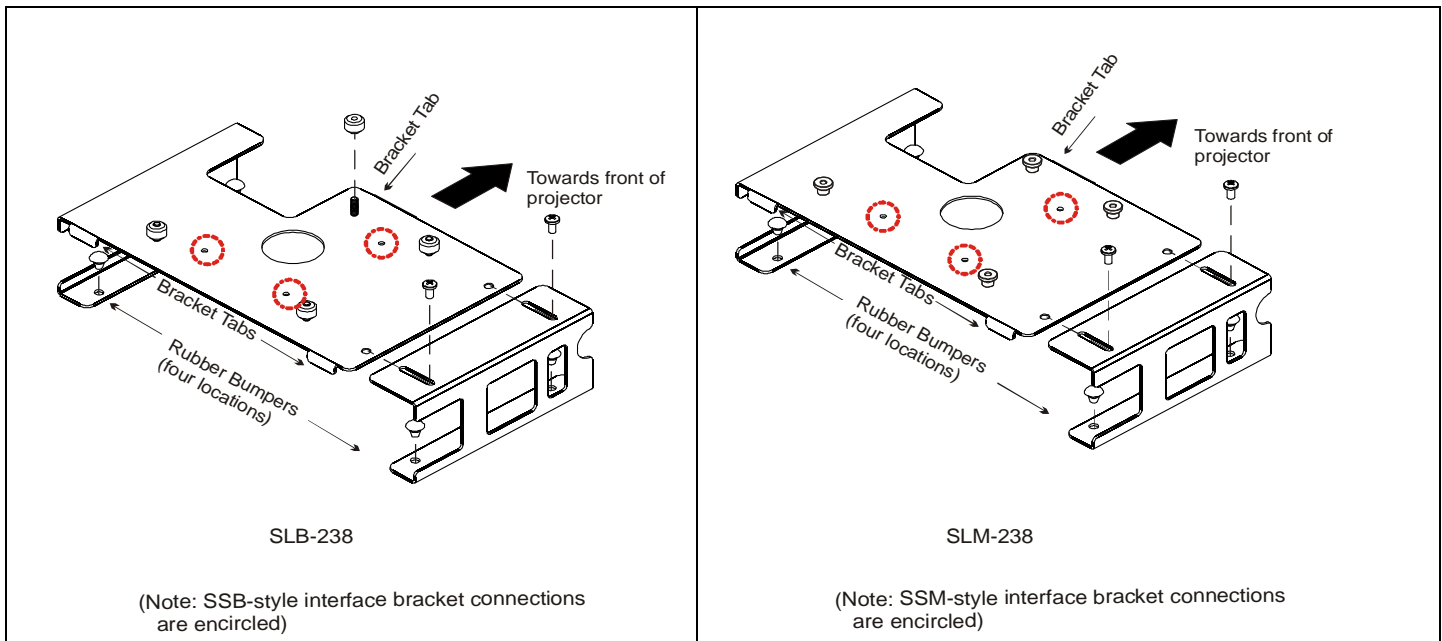

\*\*Only used when installing SLB/SSB interface brackets.

**NOTE:** Specific to SSB-style and SSM-style interface bracket installation, all appropriate screws come pre-installed as reflected in the encircled locations above. DO NOT attempt to substitute and USE ONLY this pre-installed hardware for SSB-style and SSM-style interface bracket installation.

### Installation Instructions



**WARNING: OVER TIGHTENING OF SCREWS CAN DAMAGE PARTS AND CAN LEAD TO SERIOUS PERSONAL INJURY AND DAMAGE TO EQUIPMENT! DO NOT over tighten screws when installing interface brackets.**

**NOTE:** Step 1 is only required when installing an SLB/SSB interface bracket. If an SLM/SSM bracket is being installed, proceed to step 2.

1. Screw thumb screws onto 10-24 x 5/8" Phillips pan head screws. DO NOT fully tighten thumb screws at this time.
2. Insert four rubber bumpers into both top bracket and bottom bracket.
3. Turn projector upside down and slide into open end of top bracket, placing it on top of rubber bumpers, and against two tabs in back and one tab in front of bracket.
4. Slide bottom bracket onto end of top bracket and against projector.
5. Position two 10-24 mounting screws through the top and bottom bracket. Tighten all fasteners at this time, securing the projector in place.

**NOTE:** Security screws can be substituted when mounting interface bracket to projector by using the parts and installation instructions in the All-Points Security Kit.

Chief® is a registered trademark of Milestone AV Technologies. All rights reserved.



Milestone AV Technologies, and its affiliated corporations and subsidiaries (collectively, "Milestone"), intend to make this manual accurate and complete. However, Milestone makes no claim that the information contained herein covers all details, conditions or variations, nor does it provide for every possible contingency in connection with the installation or use of this product. The information contained in this document is subject to change without notice or obligation of any kind. Milestone makes no representation of warranty, expressed or implied, regarding the information contained herein. Milestone assumes no responsibility for accuracy, completeness or sufficiency of the information contained in this document.