

INSTALLATION INSTRUCTIONS

SLB-3020 and SLM-3020 Interface Brackets


SLB-3020 and SLM-3020 Interface Brackets are designed for use with Chief® Series Projector Mounts. See the specific installation instructions provided with the mount for additional installation information.

Unpack carton and verify kit contents. If any listed parts are missing, immediately contact a Chief Customer Service representative.



WARNING: IMPROPER INSTALLATION CAN LEAD TO EQUIPMENT FALLING CAUSING SERIOUS PERSONAL INJURY AND DAMAGE TO EQUIPMENT! DO NOT substitute hardware. Use only hardware supplied by manufacturer!

- | | |
|-----------------------------|---------------------------------------|
| (1) Interface Bracket | (1) Screw, Button Head Cap, M8 x 20mm |
| (6) 10-24 Thumb Nuts ** | (1) Washer, M8 |
| (1) All-Points Security Kit | (1) Spacer Washer, 5/16" |
| (1) 5/32" Security Hex Key | (2) Cable ties, white |

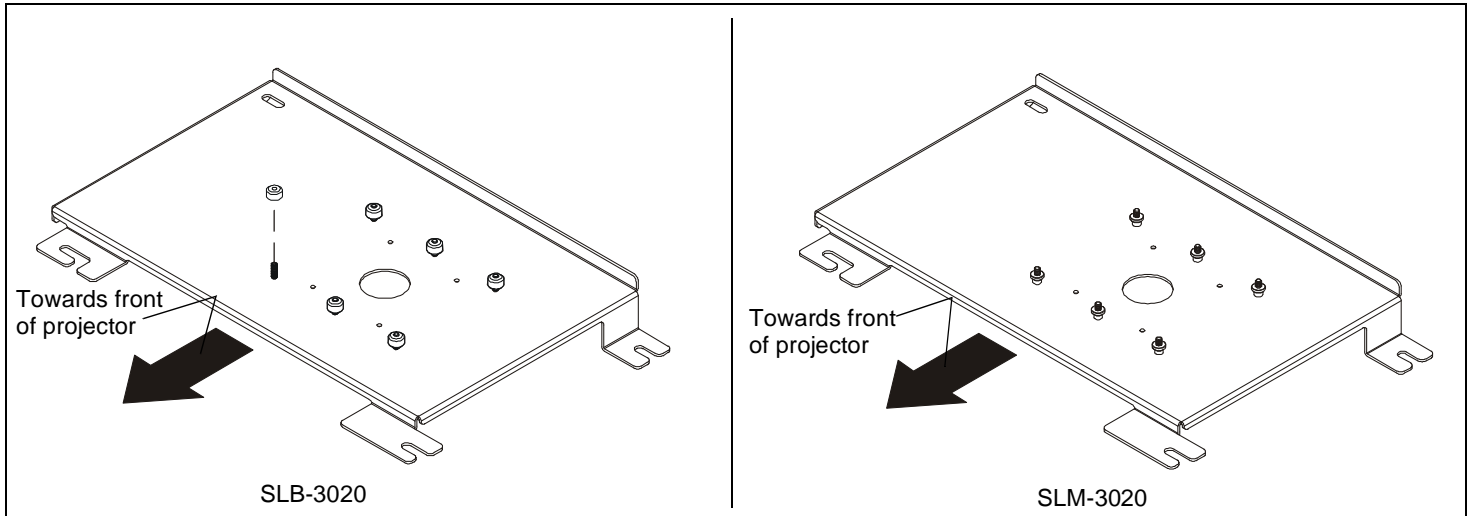

**Only used when installing SLB interface brackets.

Installation Instructions



WARNING: OVER TIGHTENING OF SCREWS CAN DAMAGE PARTS AND CAN LEAD TO SERIOUS PERSONAL INJURY AND DAMAGE TO EQUIPMENT! DO NOT over tighten screws when installing interface brackets.

NOTE: Step 1 is only required when installing an SLB interface bracket. If an SLM bracket is being installed, proceed to Step 2.

1. Screw thumb screws onto 10-24 x 5/8" Phillips pan head screws. DO NOT fully tighten thumb screws at this time.
2. Turn projector upside down on a flat surface.
3. Remove adhesive rubber foot from rear left leg of the projector to expose the threaded insert. Place 5/16" spacer washer around the left rear threaded insert to hold bracket level to projector surface.
4. Partially unscrew the remaining three adjustable projector legs so there is approximately 1/4" space between two pieces of the leg.
5. Lining up the three bracket tabs, position bracket onto bottom of projector and move bracket toward the front of projector and then to the right, ensuring that all three bracket tabs remain between the two piece adjustable legs.
6. Wrap one cable tie around each front projector leg, making sure the ties are between the projector and the adjustable thumb release on the projector.
7. Pull cable ties as tight as possible so the thumb release is immobilized.



WARNING: IMPROPER INSTALLATION CAN LEAD TO EQUIPMENT FALLING CAUSING SERIOUS PERSONAL INJURY OR DAMAGE TO EQUIPMENT! Be sure that thumb release on projector is immobilized!

continued...



Milestone AV Technologies, and its affiliated corporations and subsidiaries (collectively, "Milestone"), intend to make this manual accurate and complete. However, Milestone makes no claim that the information contained herein covers all details, conditions or variations, nor does it provide for every possible contingency in connection with the installation or use of this product. The information contained in this document is subject to change without notice or obligation of any kind. Milestone makes no representation of warranty, expressed or implied, regarding the information contained herein. Milestone assumes no responsibility for accuracy, completeness or sufficiency of the information contained in this document.



Our Mounts. Your Vision.

Chief Manufacturing, a products division of Milestone AV Technologies
6436 City West Parkway, Eden Prairie, MN 55344

• P: 800.582.6480 / 952.225.6000 • F: 877.894.6918 / 952.894.6918

8802-000037 Rev01

©2012 Milestone AV Technologies,
a Duchossois Group Company

08/12

INSTALLATION INSTRUCTIONS

...Continued

8. Cut off any excess cable tie length.
9. Ensure washer installed in Step 3 is still in place, and loosely install M8 screw through M8 washer, bracket, 5/16" spacer washer and into rear left projector foot.
10. Ensure bracket tabs are seated as tight as possible against the adjustable projector legs, and fasten three adjustable projector feet down against bracket.
11. Tighten the last bolt in left rear projector leg.

NOTE: Security screws can be substituted when mounting Interface bracket to projector by using the parts and installation instructions in the All-Points Security Kit.

Chief® is a registered trademark of Milestone AV Technologies. All rights reserved.