

# INSTALLATION INSTRUCTIONS



## SSB-860, SSM-860, SLB-860 and SLM-860 Interface Brackets

SSB-860, SSM-860, SLB-860 and SLM-860 Interface Brackets are designed for use with Chief® Series Projector Mounts. See the specific installation instructions provided with the mount for additional installation information.

Unpack carton and verify kit contents. If any listed parts are missing, immediately contact a Chief Customer Service representative.

**WARNING: IMPROPER INSTALLATION CAN LEAD TO EQUIPMENT FALLING CAUSING SERIOUS PERSONAL INJURY AND DAMAGE TO EQUIPMENT! DO NOT substitute hardware. Use only hardware supplied by manufacturer!**

- |                             |                         |
|-----------------------------|-------------------------|
| (1) Interface Bracket       | (4) Felt Squares        |
| (4) 10 - 24 Thumb Nuts**    | (2) #10 Flat Washers    |
| (1) All-Points Security Kit | (2) 10 x 24 Nylock Nuts |
| (1) U-Form Bracket          | (3) #4 Flat Washers     |
| (3) M4 x 10mm Screws        |                         |

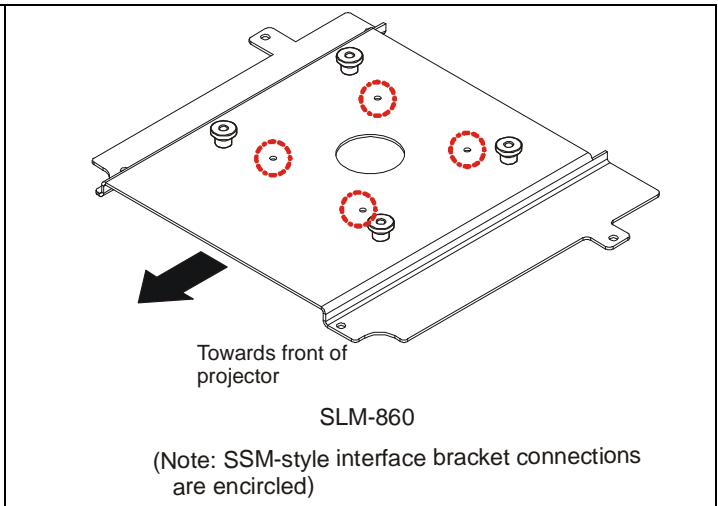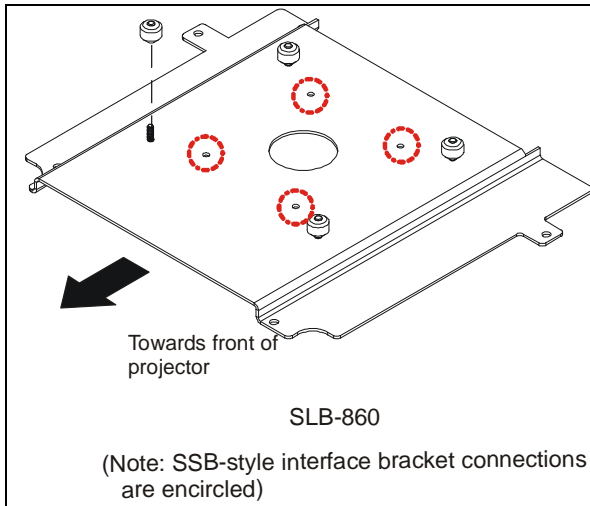

\*\*Only used when installing SLB/SSB interface brackets.

**NOTE:** Specific to SSB-style and SSM-style interface bracket installation, all appropriate screws come pre-installed as reflected in the encircled locations above. DO NOT attempt to substitute and USE ONLY this pre-installed hardware for SSB-style and SSM-style interface bracket installation.

### Installation Instructions

**WARNING: OVER TIGHTENING OF SCREWS CAN DAMAGE PARTS AND CAN LEAD TO SERIOUS PERSONAL INJURY AND DAMAGE TO EQUIPMENT! DO NOT over tighten screws when installing interface bracket.**

**NOTE:** Step 1 is only required when installing an SLB/SSB interface bracket. If an SLM/SSM bracket is being installed, proceed to step 2.

1. Screw thumb screws onto 10-24 x 5/8" Phillips pan head screws. DO NOT fully tighten thumb screws at this time.
2. Turn projector upside down on a flat surface.
3. Raise the front adjustable feet and place interface bracket on the projector. Ensure the front slots in the bracket are around the adjustable feet and the two front mounting holes in the bracket align with the two mounting inserts in the bottom front of the projector.
4. Attach the interface bracket using the three 4 x 10mm mounting screws and # 4 washers. Tighten the two front adjustable feet against the projector.
5. Attach the U-Form bracket around the projector and through the holes in the interface bracket using the two #10 flat washers and 10 x 24 Nylock nuts.
6. Tighten all fasteners at this time securing interface bracket to projector.

**NOTE:** Felt squares are provided to protect projector shell, if desired. They can be attached to the projector or wrapped around the U-Form rod. Security screws can be substituted when mounting interface bracket to projector by using the parts and installation instructions in the All-Points Security Kit.

Chief® is a registered trademark of Milestone AV Technologies. All rights reserved.



Milestone AV Technologies, and its affiliated corporations and subsidiaries (collectively, "Milestone"), intend to make this manual accurate and complete. However, Milestone makes no claim that the information contained herein covers all details, conditions or variations, nor does it provide for every possible contingency in connection with the installation or use of this product. The information contained in this document is subject to change without notice or obligation of any kind. Milestone makes no representation of warranty, expressed or implied, regarding the information contained herein. Milestone assumes no responsibility for accuracy, completeness or sufficiency of the information contained in this document.



Our Mounts. **Your Vision.**

Chief Manufacturing, a products division of Milestone AV Technologies  
8401 Eagle Creek Parkway, Savage, MN 55378

• P: 800.582.6480 / 952.894.6280 • F: 877.894.6918 / 952.894.6918

8802-000007 Rev01

©2009 Milestone AV Technologies,  
a Duchossois Group Company

05/09