

---

# INSTALLATION INSTRUCTIONS

---

## Truss Bracket

Prior to assembly, unpack carton completely and verify contents. If you are missing any of the following components, please contact Technical Support at 1-800-776-5768.

- (1) FRONT BRACKET
- (2) BACK BRACKET
- (8) 5/16-18 X 2½" HEX HEAD CAP SCREW
- (8) 5/16" WASHER
- (4) 2" SPACER
- (4) 5/16-18 X 1" HEX HEAD CAP SCREW
- (4) 5/16" LOCK WASHER
- (4) 5/16-18 NUT

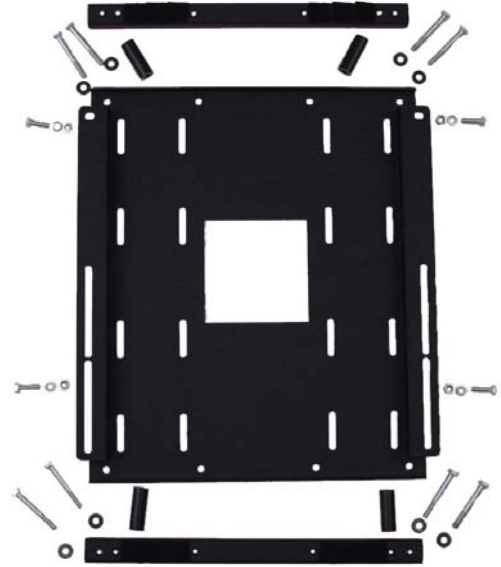


Figure 1

### READ INSTALLATION INSTRUCTIONS COMPLETELY BEFORE PROCEEDING

1. Install, loosely, the inside bracket on the front bracket using one bolt, washer, and spacer as shown in Figure 2.
2. Slide the bracket over the truss at the desired location and secure using one bolt, washer, and spacer as shown in Figure 3.
3. Using two bolts, washers, and spacers, secure remaining inside bracket to bottom of front bracket as shown in Figure 4.
4. Install remaining bolts and washers, without spacers, in holes that best fit if possible. Do not over tighten bolts.
5. Install mount in appropriate mounting holes as described in mount installation instructions.

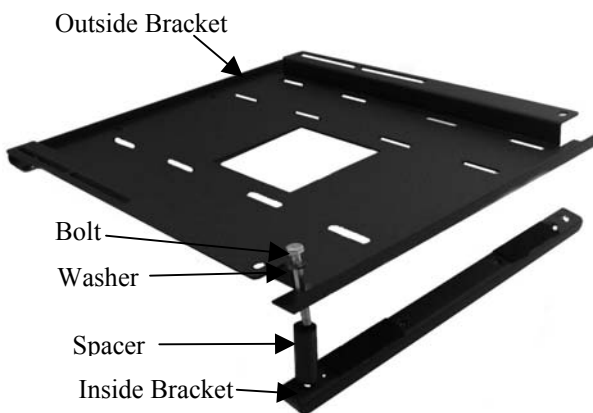


Figure 2



Figure 3

Bolt and washer without spacer  
Do Not Over Tighten

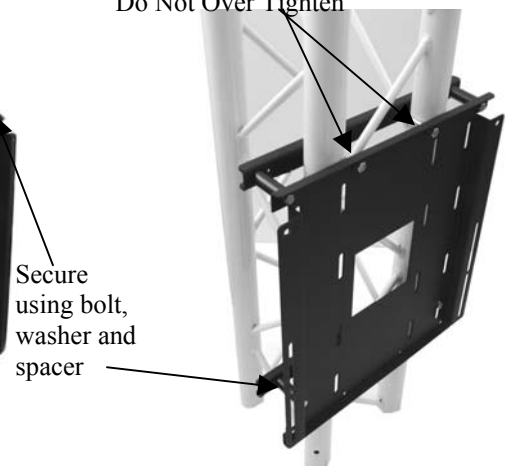


Figure 4