

# INSTALLATION INSTRUCTIONS

## EXTENSION COLUMNS


### UMA-006009 to UMA-020036

The UMA-006009 through the UMA-020036 extension columns can be used with any NPT 1" coupler to lower your mount to the desired height. The extension columns provide vertical adjustments in 1" increments. The column tube telescopes and bolts through at the desired height.

**WARNING: IMPROPER INSTALLATION MAY RESULT IN SERIOUS PERSONAL INJURY!**

All components must be securely fastened to a structural member capable of supporting five times the combined weight of all components plus the equipment being mounted. If it cannot support this weight, the structure **MUST** be reinforced.

The maximum weight to be installed on the column is 200 pounds (90.7 Kg).

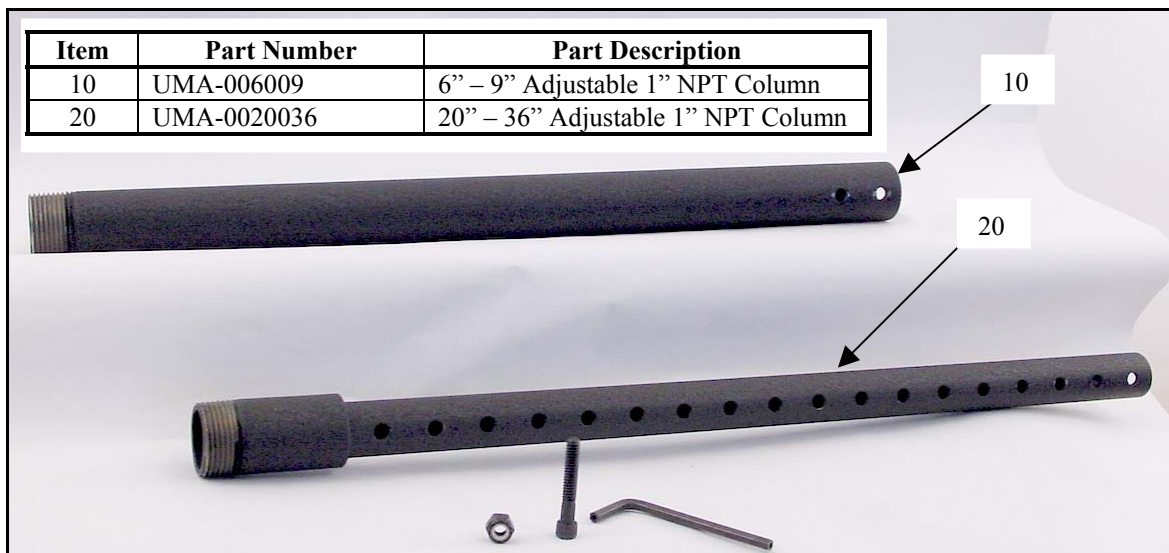

1. Unpack and check contents.

QTY	DESCRIPTION	QTY	DESCRIPTION
1	Extension Tube	1	1/4-20 Nylock Nut
1	Adjuster Tube	1	3/16" Allen Wrench
1	1/4-20 x 1 1/2" Bolt		

2. Slide adjuster tube into extension pipe to desired length; match holes in adjuster tube with extension pipe.
3. Install 1/4" –20 x 1 1/2" bolt into the side with the larger hole. Ensure that the bolt head hits the inner pipe.
4. Secure adjuster tube to extension pipe by installing 1/4-20 Nylock nut and tighten using proper size wrench and hex key.

**WARNING! ALWAYS THREAD EXTENSION PIPE AND ADJUSTER TUBE AT LEAST 6 OR 7 FULL TURNS INTO MATING SURFACES.**



**CHIEF MANUFACTURING INC.**  
1-800-582-6480 952-894-6280 FAX 952-894-6918  
8401 EAGLE CREEK PARKWAY  
SAVAGE, MINNESOTA 55378 USA

8803-000045 Rev. A  
2004 Chief Manufacturing  
[www.chiefmfg.com](http://www.chiefmfg.com)  
04/04