



INSTALLATION INSTRUCTIONS SLB-072 HANGER BRACKET


for iMatte iSkia S1.20,

Prior to assembly, unpack carton and verify contents.

For security installation, use security hardware package inside the ALL-POINTS™ Security Kit. Follow the instructions below for attaching the bracket to the projector using either standard hardware or security hardware.

If you are missing any of the following components, please contact Customer Service at 1-800-582-6480

- | | | | |
|-----|--------------------|-----|--------------------------------|
| (1) | SLB-072 Bracket | (4) | #10 Flat washers |
| (6) | 10 - 24 Thumb Nuts | (4) | 10 – 32 x 3/8” Pan Head Screws |

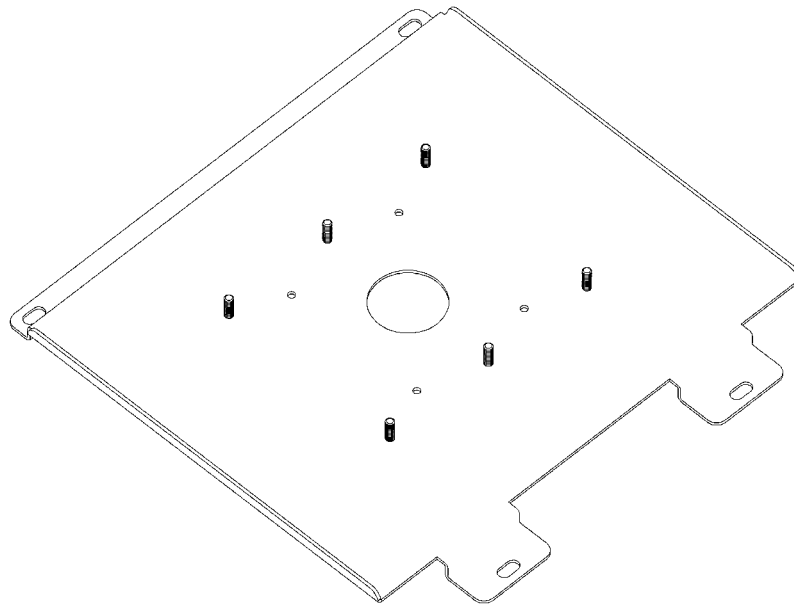

INSTALLATION INSTRUCTIONS

1. Turn projector upside down on a flat surface.
2. Remove the two front adjustable feet and place them in a safe place for future use.
3. Place the SLB-072 bracket onto the bottom of the projector lining up the four holes in the bracket with the four threaded inserts in the bottom of the projector.
4. Using the four # 10 – 32 X 3/8” mounting screws and #10 washers, place the screw through the washer and bracket and start them into the mounting holes by hand, secure all four fasteners at this time. **CAUTION: When attaching the mount be careful not to over tighten mounting screws.**
5. See RPA and/or Smart-Lift™ Instructions.