SANUS SYSTEMS

THE UNION OF FORM AND FUNCTION

Assembly Instructions for Model: VMCA8b-01

Thank you for choosing a Sanus Systems VisionMount™ accessory. The Ceiling Plate is designed for ease of installation with any height of drop ceiling. By using any length of standard NPT 1½" pipe threaded both ends, you can extend the height capabilities to meet your needs.

⚠ **WARNING:** If you do not understand these directions, or have any doubts about the safety of the installation, please contact Sanus at 800.359.5520 or www.sanus.com. Check carefully to make sure that there are no missing or defective parts. Our customer service representatives can quickly assist you with installation questions and missing or damaged parts. Replacement parts for products purchased through authorized dealers will be shipped directly to you. Never use defective parts. Improper installation may cause damage or serious injury. Do not use this product for any purpose that is not explicitly specified by Sanus Systems. Sanus Systems can not be liable for damage or injury caused by incorrect assembly, or incorrect use. Please contact Sanus Systems before returning products to the point of purchase.

⚠ **WARNING: Inproper installation may result in serious personal injury. When mounting Sanus accessories, the structural system and mounting method must be capable of supporting five (5) times the combined weight of the total installation. The maximum weight to be installed on the Ceiling Plate is 500 lbs. [226.8 Kg].**

Parts List:

(1) 8" Flat Ceiling Plate, (1) #10-24 Socket Set Screw, (1) 3/32" Hex Wrench

1. Securely install the Ceiling Plate to the ceiling joist. Bolt hole spacing is shown in Diagram 1.
2. Install and securely tighten NPT 1-1/2" pipe into the threaded portion of the Ceiling Plate.
3. Install and securely tighten the #10-24 Socket Set Screw.
4. Follow the Ceiling Mount Instruction for mating components or mounts.
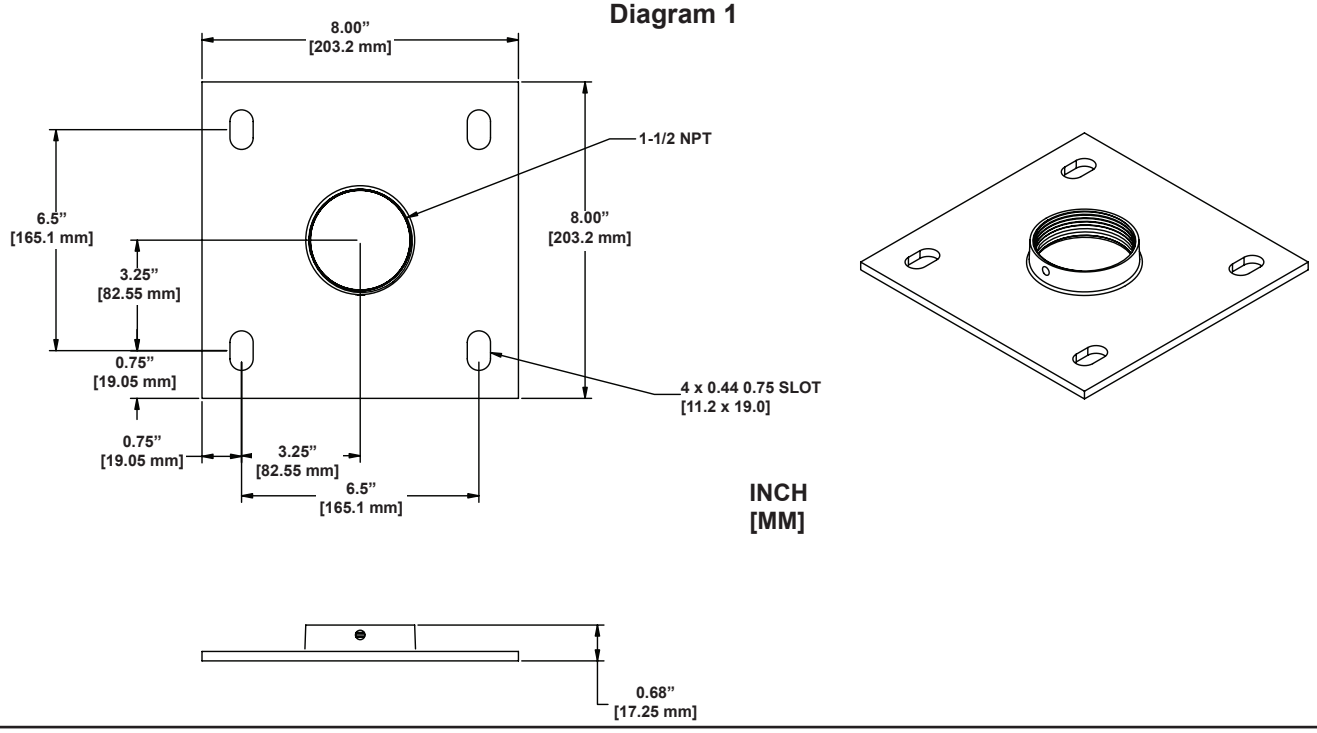
Diagram 1