




INSTALLATION INSTRUCTIONS
PDB-100
PLASMA DISPLAY MOUNTING BRACKET
for JVC GD-V4200PZW 42"

Prior to assembly, unpack carton completely and verify contents.
If you are missing any of the following components, please contact Customer Service at 1-800/582-6480

(1) PDB-100 Plasma Mounting Bracket

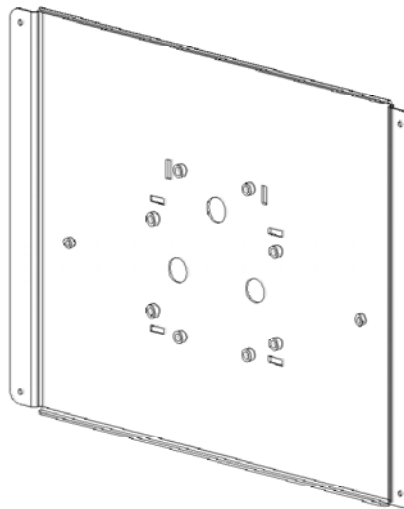

(4) M5 – 0.8 x 16mm Button Socket Head Cap Screws
(4) 5/16 - 18 x 5/8" Hex Head Bolts

(1) 3mm Short Arm Allen Key
(4) Ø 3/8" ID x Ø 29/32" OD Flat Washers

BEFORE PROCEEDING, READ INSTALLATION INSTRUCTIONS COMPLETELY

CAUTION! PLASMA DISPLAYS ARE EXTREMELY FRAGILE.
CAREFULLY LAY DISPLAY SCREEN-SIDE-DOWN
ON A CLEAN, PREFERABLY CUSHIONED, SURFACE.

1. Align CIRCLED hole pattern on PDB-100 with pattern on back of Plasma Display, with rectangular slots oriented towards the top of the Plasma Display.
2. Attach to Plasma Display using (4) M5 – 0.8 x 16mm BSHCS.
3. With the aid of another person, lift Plasma Display up to Chief Mount.

This Plasma Display can be mounted in one of two positions: one vertical & one horizontal. Each position has its own mounting pattern. There are two rectangular slots oriented at the top of each mounting pattern. Align the two rectangular slots of applicable mounting pattern in Plasma Mounting Bracket, with exposed J-hooks on Chief Mount, and hang Plasma Display onto J-hooks. Attach Plasma Display to Chief Mount using (4) 5/16 - 18 x 5/8" bolts & (4) Ø 3/8" ID x Ø 29/32" flat washers.