



## INSTALLATION INSTRUCTIONS

# PDB-40


## PLASMA DISPLAY MOUNTING BRACKET

for N.E.C. PLASMASYNC 4200W/5000W, Runco PL-42, & Sanyo 42"

Prior to assembly, unpack carton completely and verify contents.

If you are missing any of the following components, please contact Customer Service at 1-800/582-6480

(1) PDB-40 Plasma Mounting Bracket

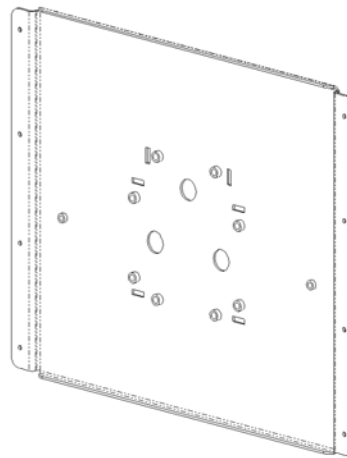

(8) M4 – 0.7 x 12mm Button Socket Head Cap Screws  
(8) M5 – 0.8 x 12mm Button Socket Head Cap Screws  
(4) 5/16 - 18 x 5/8" Hex Head Bolts

(1) 2.5mm Short Arm Allen Key  
(1) 3mm Short Arm Allen Key  
(4) Ø 3/8" ID x Ø 29/32" OD Flat Washers

**BEFORE PROCEEDING, READ INSTALLATION INSTRUCTIONS COMPLETELY**

## CAUTION!

**PLASMA DISPLAYS ARE EXTREMELY FRAGILE.**

**CAREFULLY LAY DISPLAY SCREEN-SIDE-DOWN**

**ON A CLEAN, PREFERABLY CUSHIONED, SURFACE.**

1. Align hole pattern on PDB-40 with pattern on back of Plasma Display, with rectangular slots oriented towards the top of the Plasma Display.
2. Attach to Plasma Display using (8) M4 – 0.7 x 12mm BSHCS for 42" Plasma, or (8) M5 – 0.8 x 12mm BSHCS for 50" Plasma.
3. With the aid of another person, lift Plasma Display up to Chief Mount.  
This Plasma Display can be mounted in one of two positions: one vertical & one horizontal. Each position has its own mounting pattern. There are two rectangular slots oriented at the top of each mounting pattern. Align the two rectangular slots of applicable mounting pattern in Plasma Mounting Bracket, with exposed J-hooks on Chief Mount, and hang Plasma Display onto J-hooks. Attach Plasma Display to Chief Mount using (4) 5/16 - 18 x 5/8" bolts & (4) Ø 3/8" ID x Ø 29/32" flat washers.