

INSTALLATION INSTRUCTIONS

PSB-2120 DISPLAY MOUNTING BRACKET

Prior to assembly, unpack carton completely and verify contents.

If you are missing any of the following components, please contact Customer Service at 1-800/582-6480




Figure 1

- (2) Plasma Side Bracket
- (4) Mounting Button - Tapped
- (4) M5 x 25mm Phillips Pan Head Machine Screw
- (4) M5 Flat Washer

- (1) 1/8 Allen Key
- (4) 10-24 x .5 Button Head Cap Screw
- (4) .500 x .257 x .625 Nylon Spacer

BEFORE PROCEEDING, READ INSTALLATION INSTRUCTIONS COMPLETELY

CAUTION! **DISPLAYS ARE EXTREMELY FRAGILE.**

WARNING!

ALL COMPONENTS MUST BE SECURELY FASTENED TO A STRUCTURAL MEMBER CAPABLE OF SUPPORTING 4 TIMES THE COMBINED WEIGHT OF ALL COMPONENTS PLUS THE EQUIPMENT BEING MOUNTED. IF IT CANNOT SUPPORT THIS WEIGHT, THE STRUCTURE MUST BE REINFORCED.

THE MAXIMUM WEIGHT TO BE INSTALLED ON THE MOUNT IS 200 POUNDS (79.38 KG).

1. Using a 10-24 button head cap screw inserted from back side of bracket, secure mounting button, with chamfered hole of mounting button (larger surface) facing bracket, to top and bottom brackets (four places) (see Figure 2 & Figure 3).




Figure 2




Figure 3

2. Place Nylon spacers over mounting holes on back of screen. Attach mounting brackets to display using M5 screws (see Figures 4 & Figure 5).

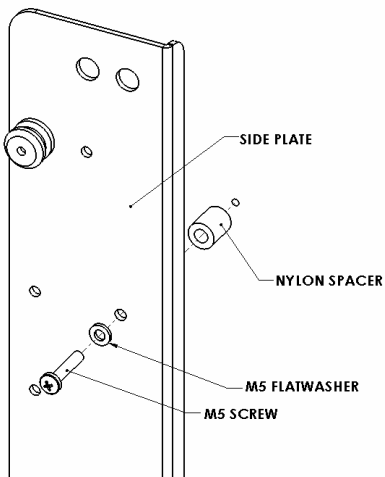


Figure 6

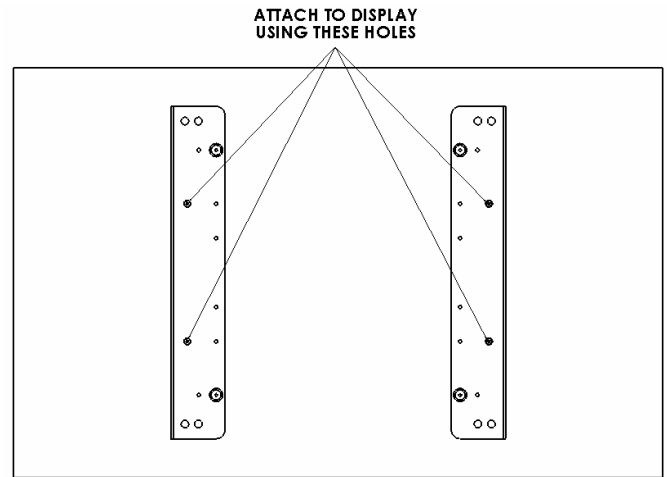


Figure 7

3. With the aid of another person, lift your display up to the Chief Mount, aligning buttons of mounting brackets with slots in the Chief Mount.
4. Lower safety latch on the Chief Mount to secure your display, making sure latch is completely engaged.