

# INSTALLATION INSTRUCTIONS

## SLB-780 and SLM-780 Interface Brackets


SLB-780 and SLM-780 Interface Brackets are designed for use with Chief® Series Projector Mounts. See the specific installation instructions provided with the mount for additional installation information.

Unpack carton and verify kit contents. If any listed parts are missing, immediately contact a Chief Customer Service representative.



**WARNING: IMPROPER INSTALLATION CAN LEAD TO EQUIPMENT FALLING CAUSING SERIOUS PERSONAL INJURY AND DAMAGE TO EQUIPMENT! DO NOT substitute hardware. Use only hardware supplied by manufacturer!**

- |                             |  |
|-----------------------------|--|
| (1) Interface Bracket       | (2) Screw, Phillips Pan Head, Machine, M4 x 12mm |
| (4) 10-24 Thumb Nuts **     | (2) Screw, Button Head, Cap, M3 x 6mm            |
| (1) All-Points Security Kit | (2) Washer, M4                                   |
| (1) 5/32" Security Hex Key  | (2) Washer, M3                                   |
| (1) M2 Hex Key              | (2) Rubber Bump-on                               |

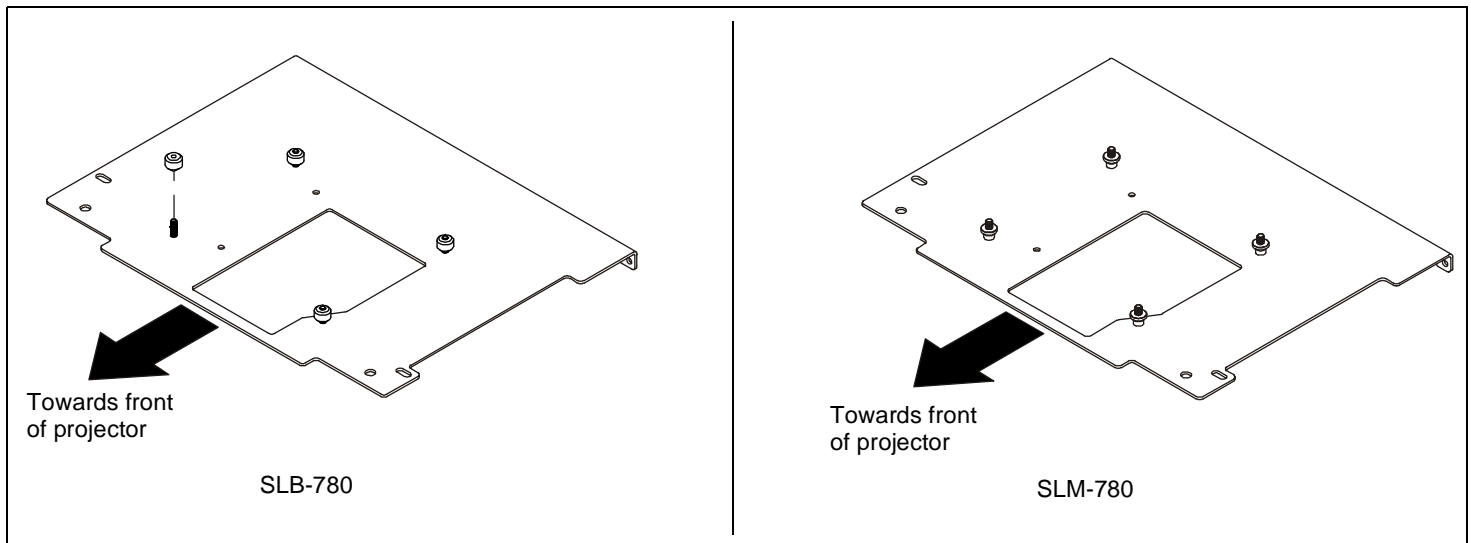

\*\*Only used when installing SLB interface brackets.

## Installation Instructions



**WARNING: OVER TIGHTENING OF SCREWS CAN DAMAGE PARTS AND CAN LEAD TO SERIOUS PERSONAL INJURY AND DAMAGE TO EQUIPMENT! DO NOT over tighten screws when installing interface brackets.**

**NOTE:** Step 1 is only required when installing an SLB interface bracket. If an SLM bracket is being installed, proceed to step 2.

1. Screw thumb screws onto 10-24 x 5/8" Phillips pan head screws. DO NOT fully tighten thumb screws at this time.
2. Turn projector upside down on a flat surface.
3. Insert two rubber bump-ons from bottom of bracket up through two large round holes at front of bracket.
4. Place the interface bracket onto the bottom of the projector, aligning the mounting holes in the bracket with the threaded inserts in the bottom of the projector and ensuring that bracket points towards front of projector as shown in above drawing.
5. Position M4 x 12mm mounting screws with M4 flat washers into the slots on top of bracket and into threaded inserts. Place the M3 x 6mm screws with M3 flat washers into the mounting holes on tabs at back of bracket and into threaded inserts. Tighten all fasteners at this time, securing the bracket to the projector.

**NOTE:** Security screws can be substituted when mounting Interface bracket to projector by using the parts and installation instructions in the All-Points Security Kit.

Chief® is a registered trademark of Milestone AV Technologies. All rights reserved.



Milestone AV Technologies, and its affiliated corporations and subsidiaries (collectively, "Milestone"), intend to make this manual accurate and complete. However, Milestone makes no claim that the information contained herein covers all details, conditions or variations, nor does it provide for every possible contingency in connection with the installation or use of this product. The information contained in this document is subject to change without notice or obligation of any kind. Milestone makes no representation of warranty, expressed or implied, regarding the information contained herein. Milestone assumes no responsibility for accuracy, completeness or sufficiency of the information contained in this document.